





How to be a DYMO[®] TAPEWRITER[®] EXPERT

FOR MODELS M-11, M-22, M-33 TAPEWRITERS

TO **LO. 10** SELECT A ROLL
OF TAPE AND REMOVE SEAL

OPEN MAGAZINE COVER AND
INSERT ROLL — PULL ABOUT
TWO (2) INCHES OF TAPE THROUGH
SLOT AND CLOSE COVER.


WITH YOUR LEFT THUMB,
GUIDE THE TAPE DOWN TRACK
AND BETWEEN FEED ROLLERS.

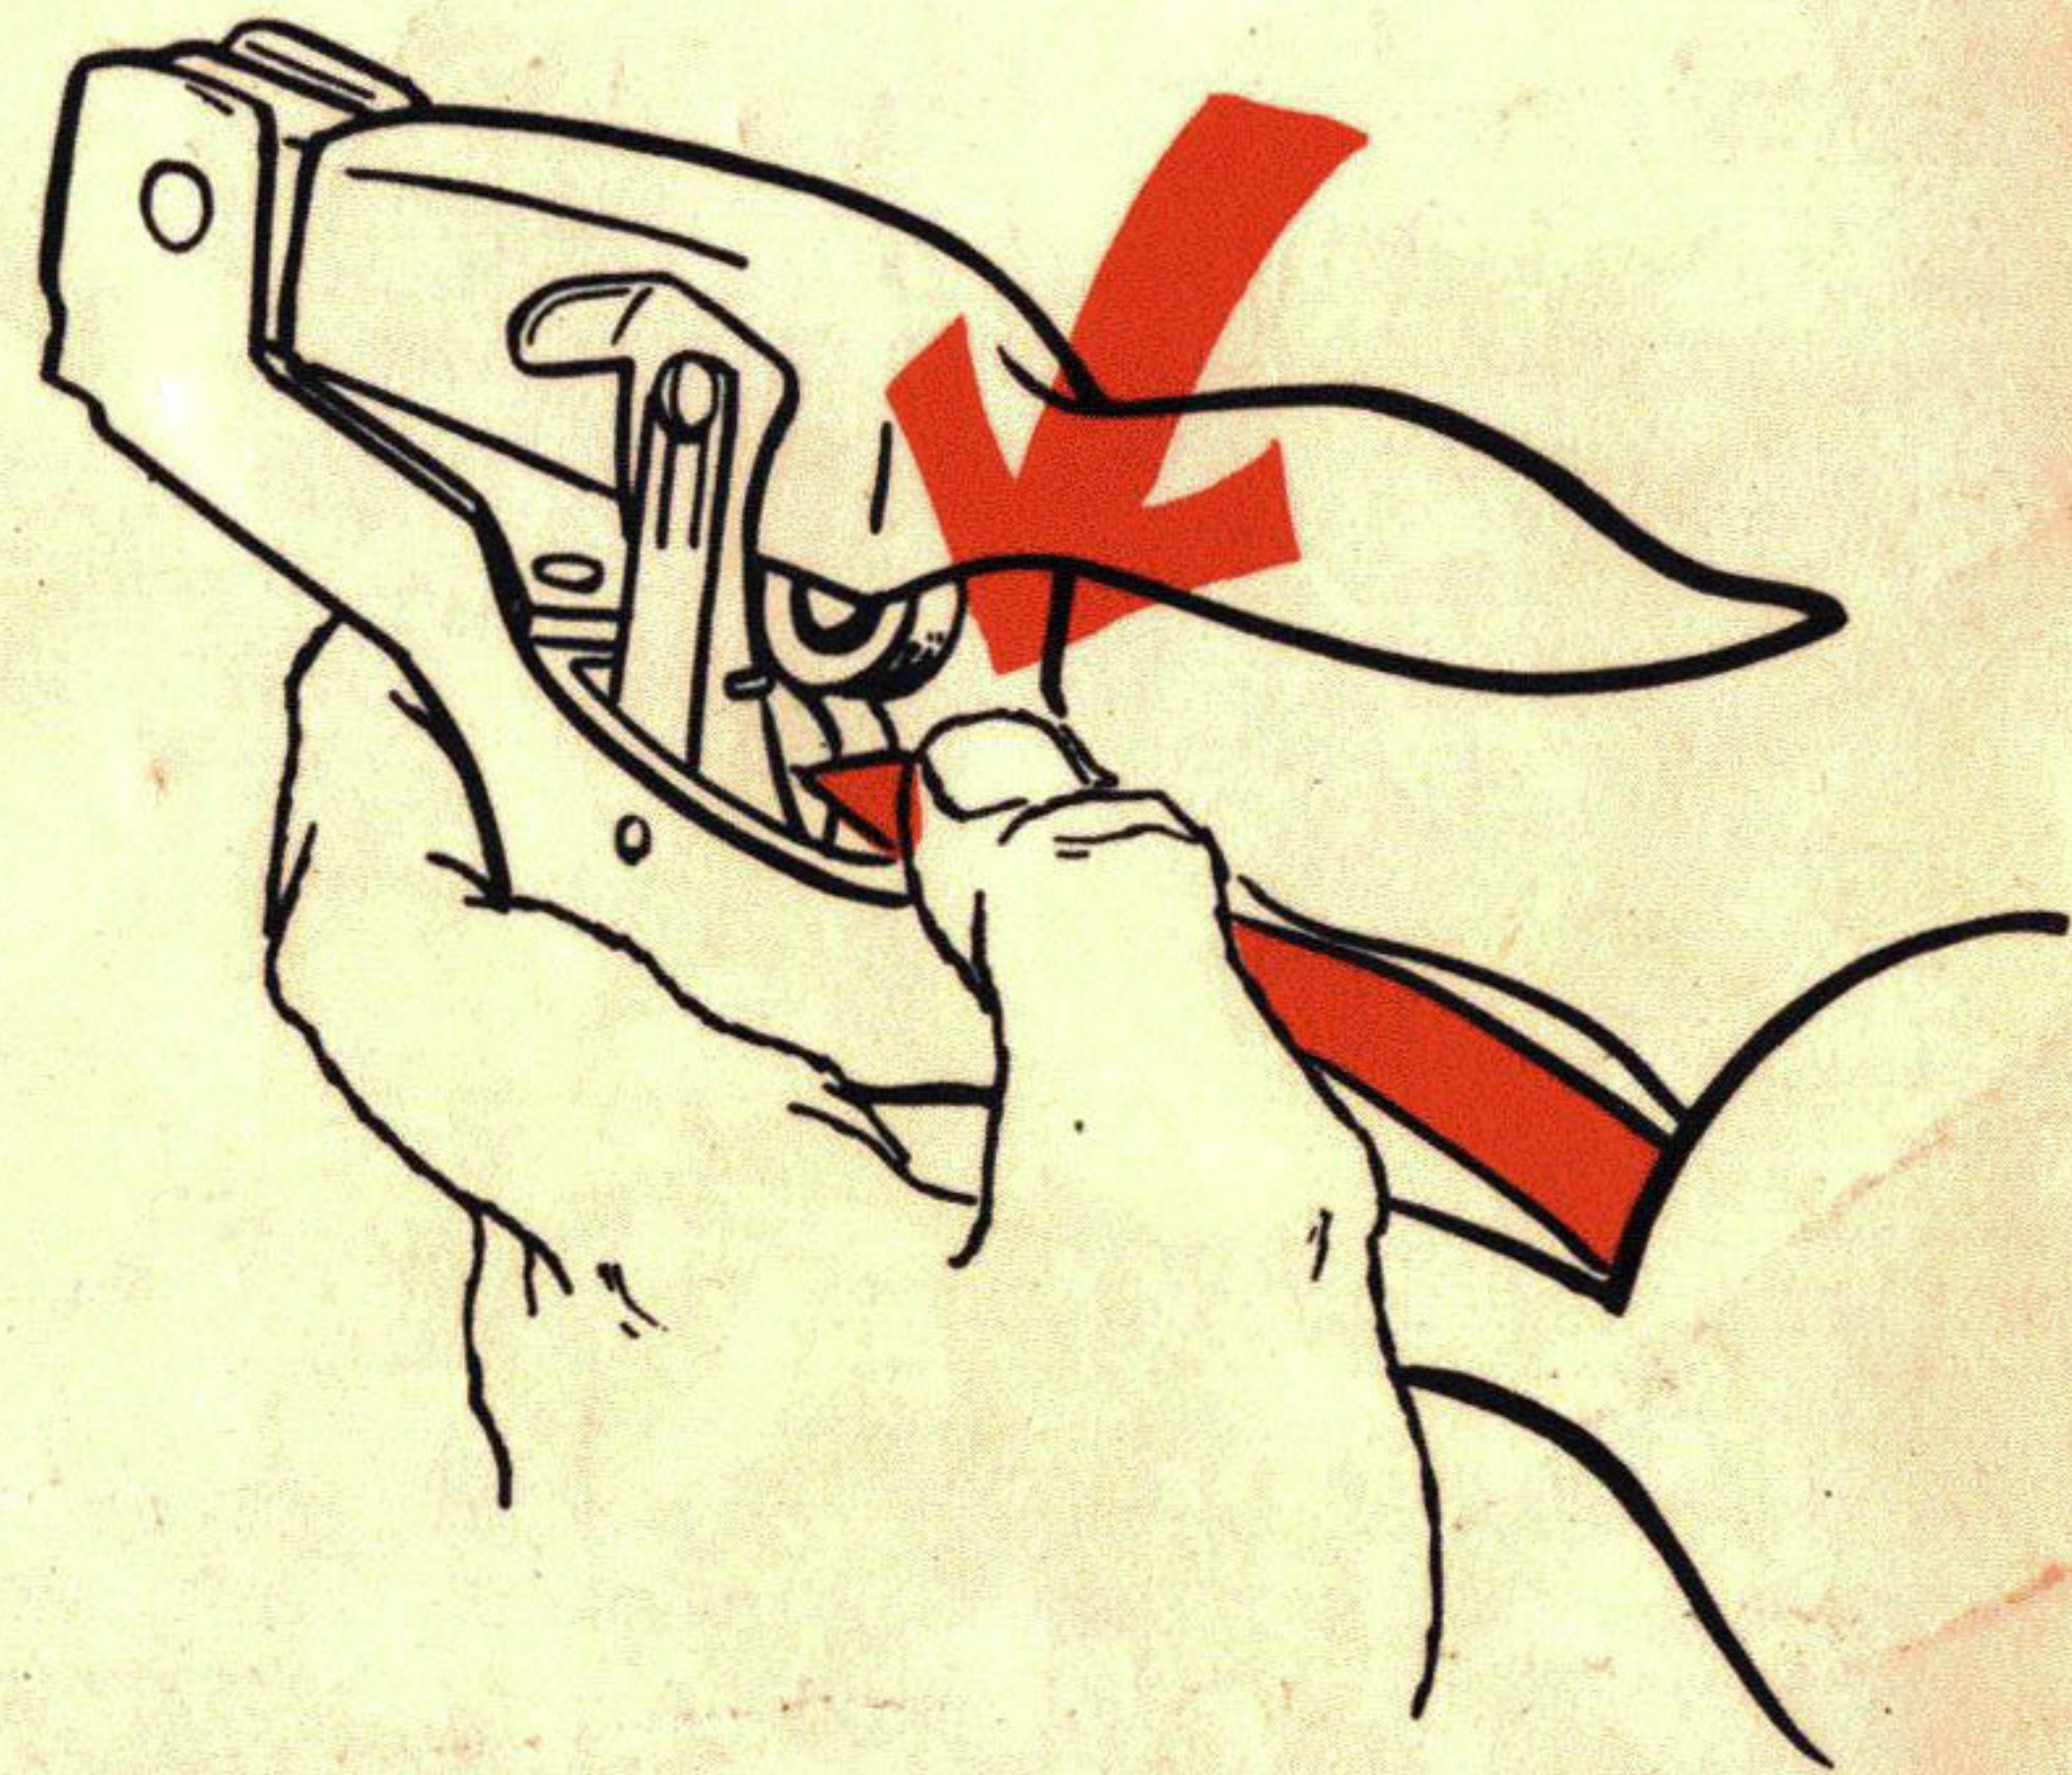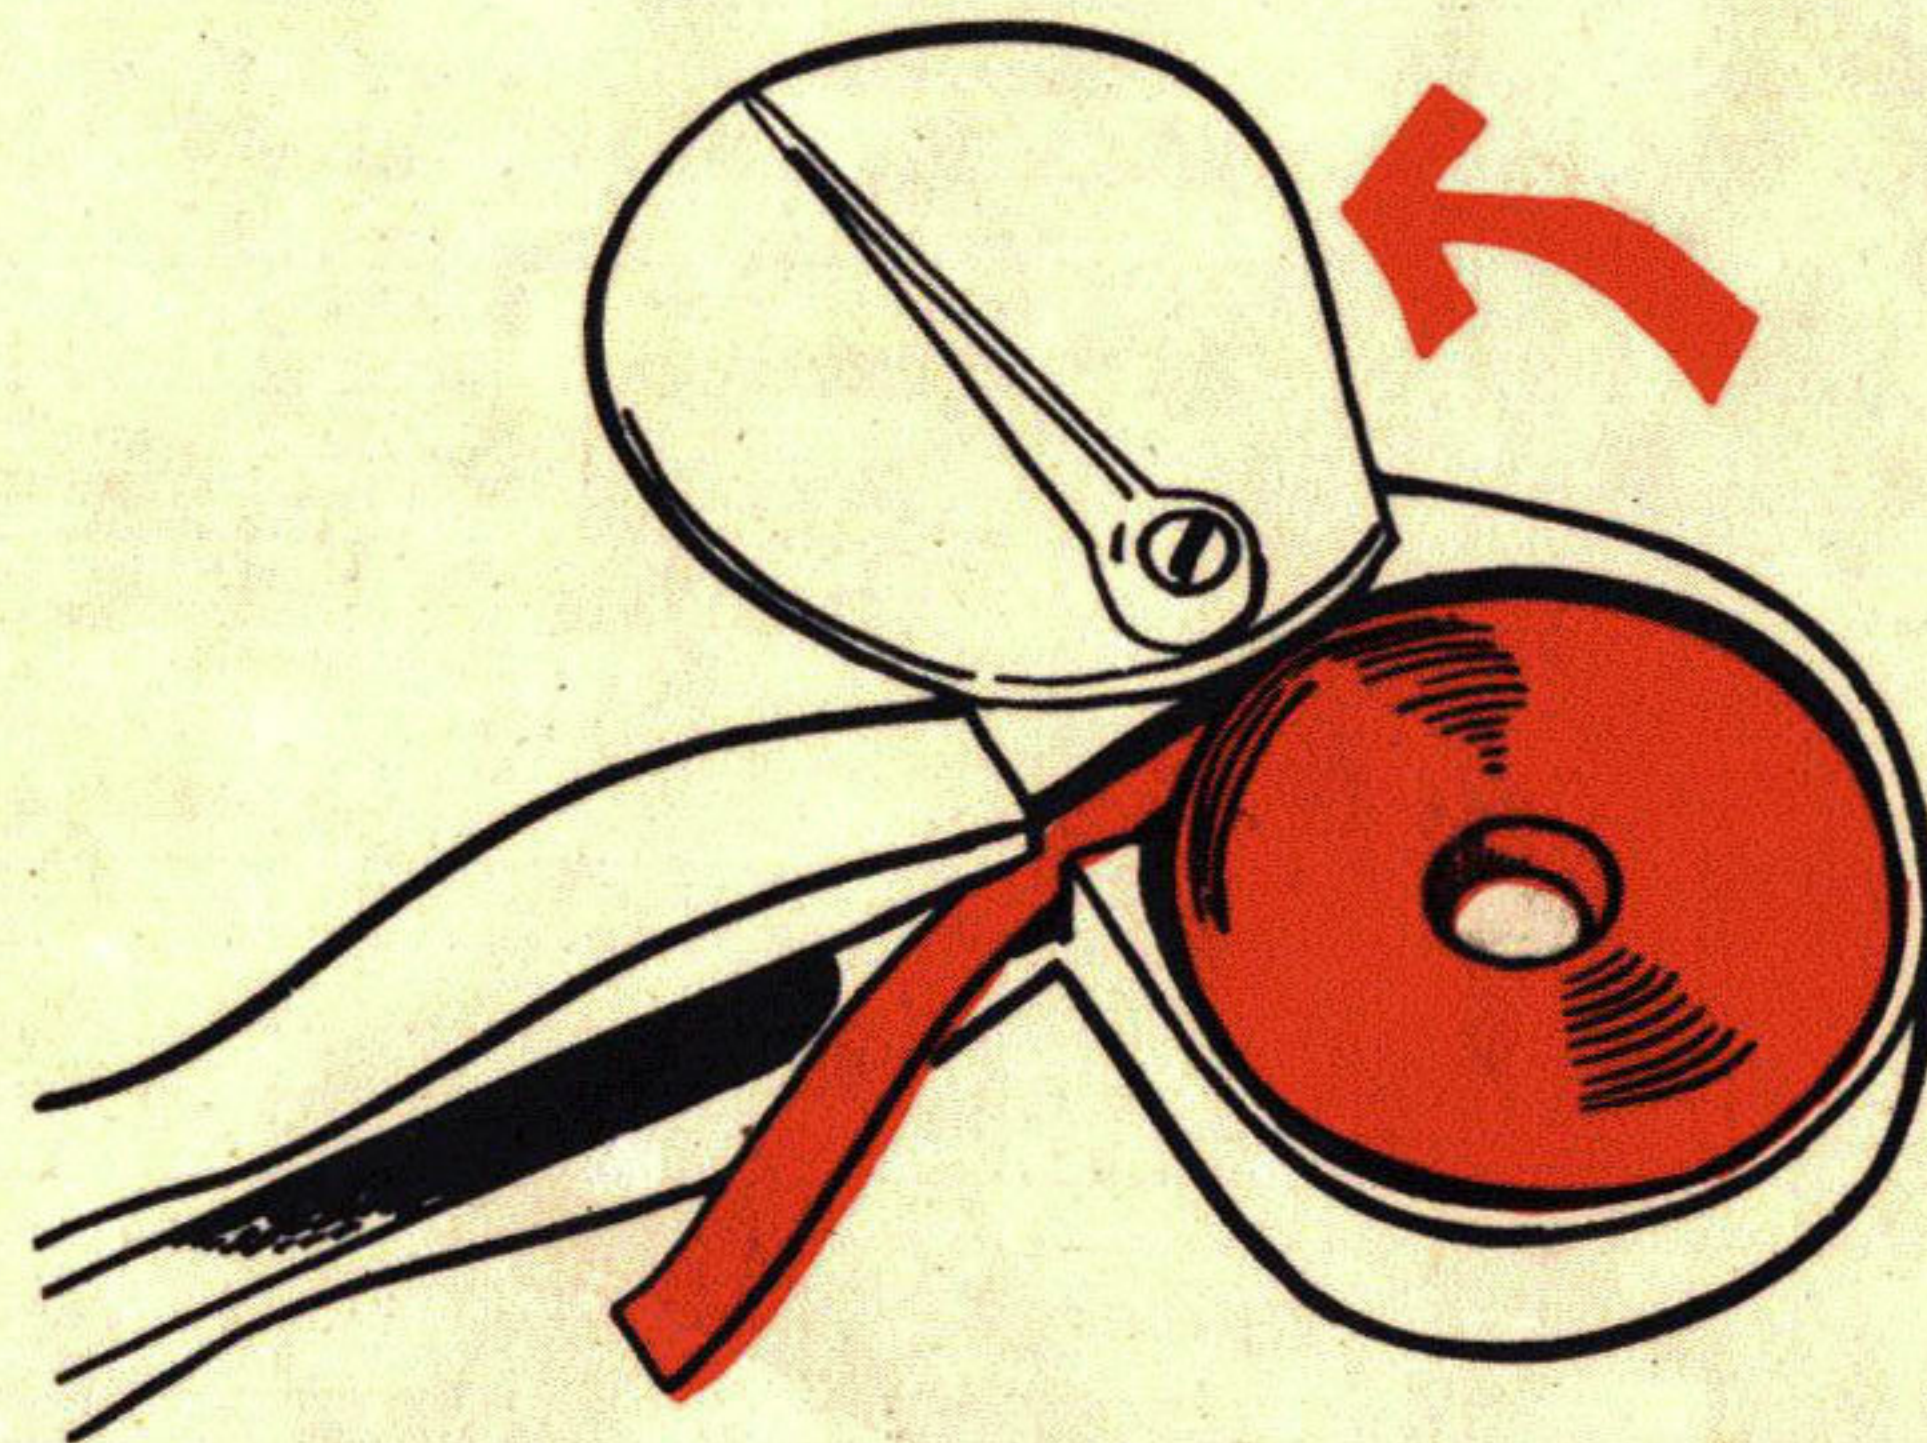

TURN **TAPEWRITER** OVER. WITH YOUR RIGHT THUMB, ROTATE **KNOB** TO ADVANCE TAPE.

EACH "CLICK"* ADVANCES THE TAPE ONE (1) SPACE... **STOP** THE TAPE AT THE **START ARROW**!



IF TAPE GOES / **ARROW**, RELEASE **KNIFE** AND TURN **KNIFE** AND **RELEASE** ALIGN TAPE WITH **START** TAPE **ALLOW**

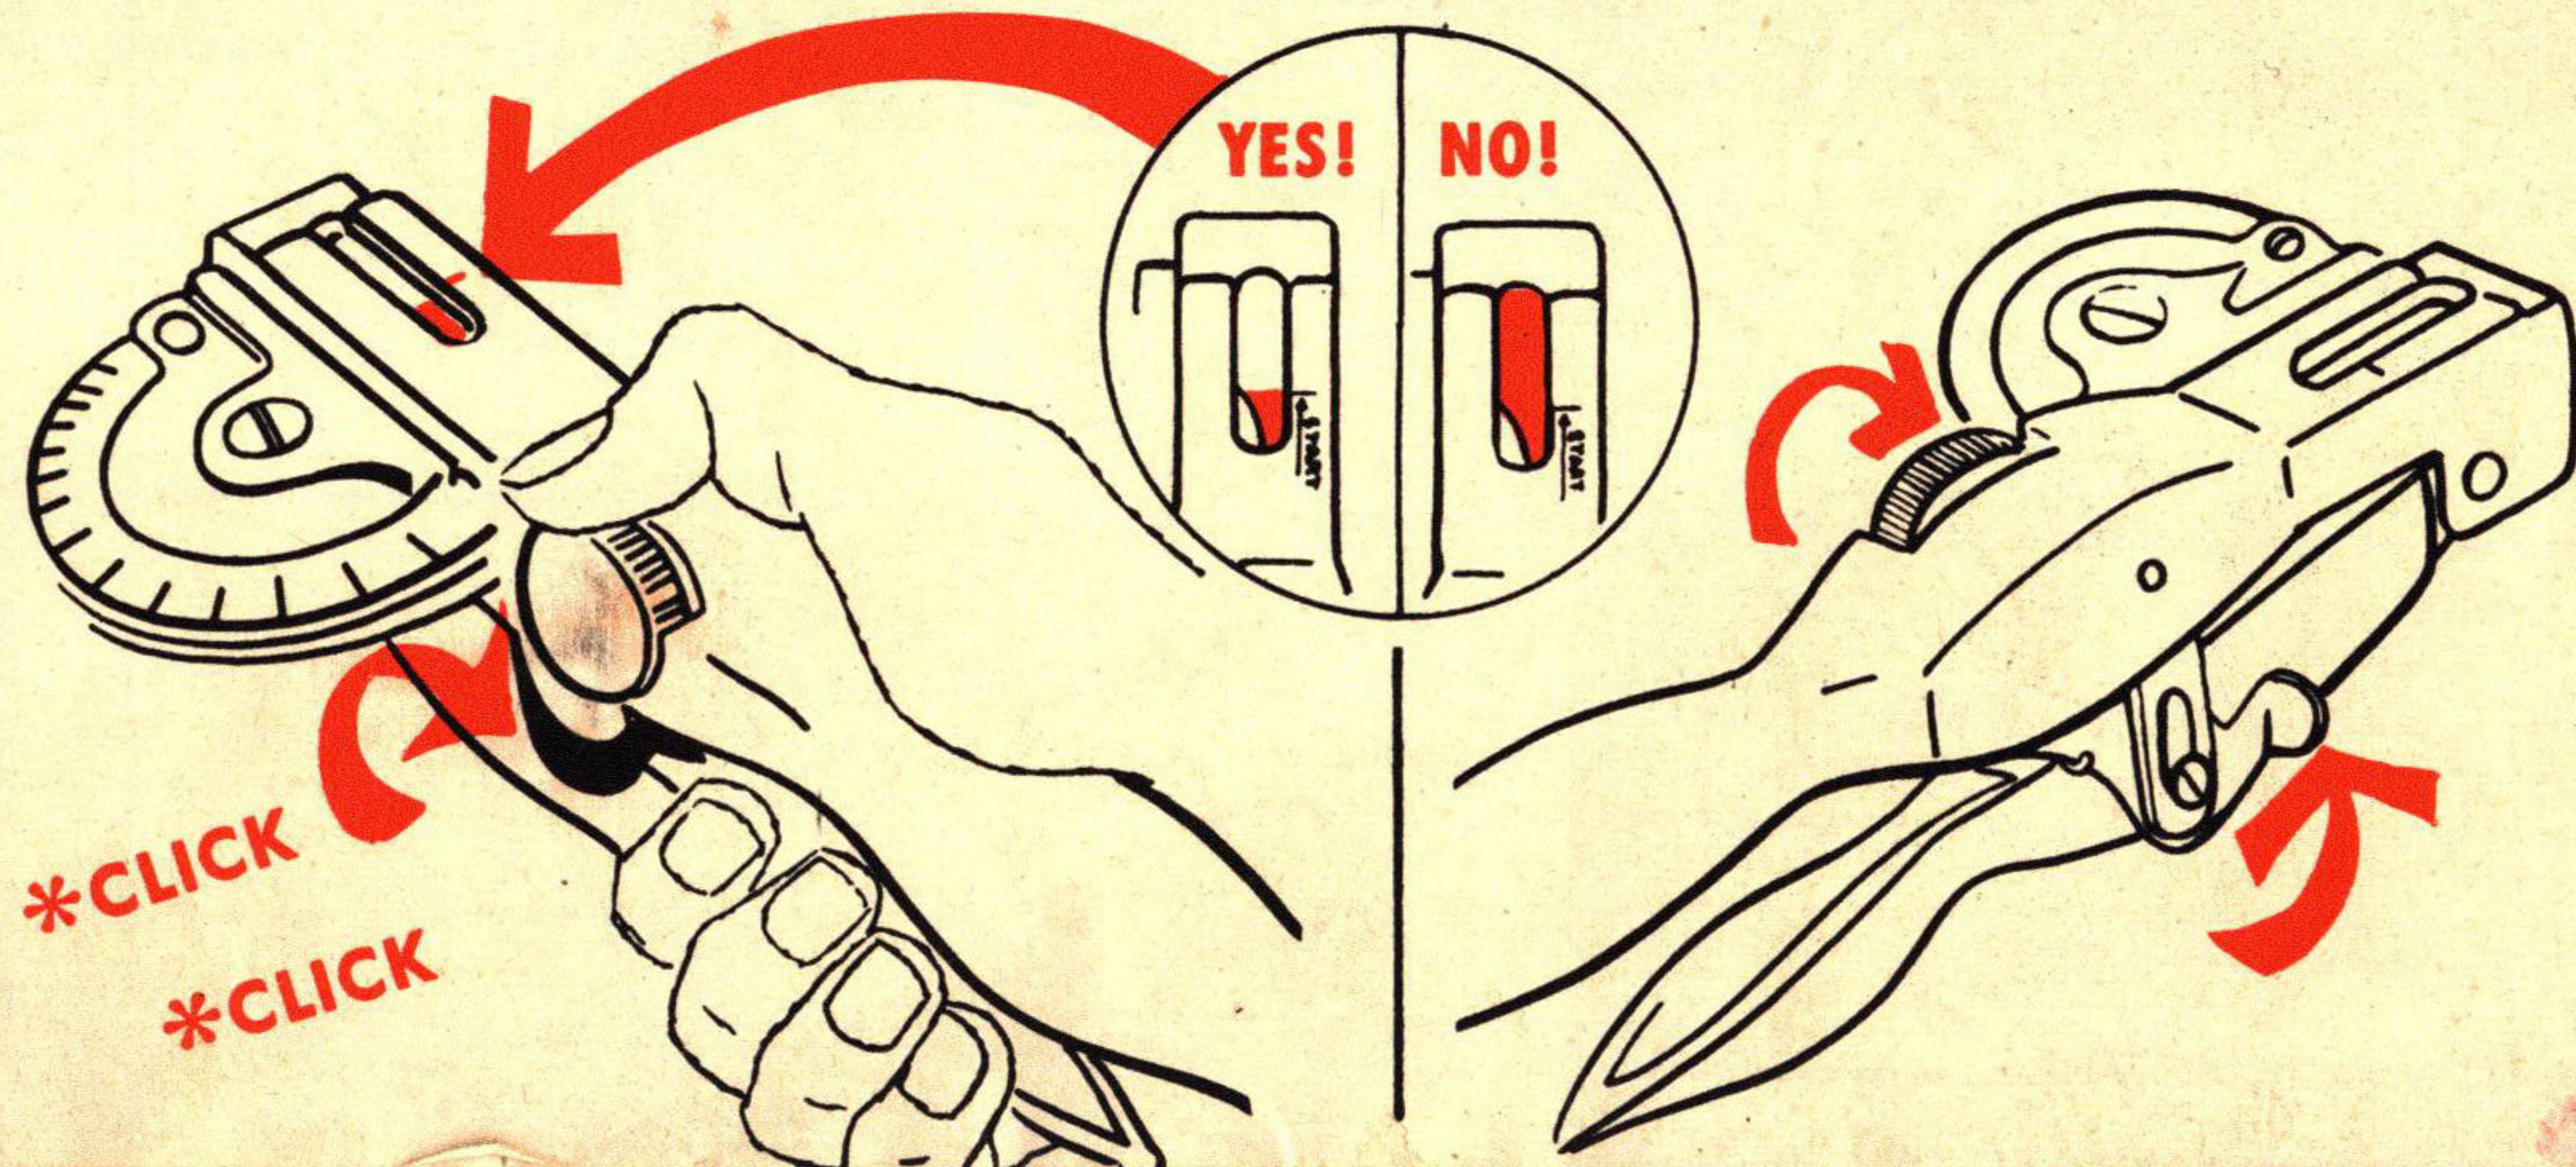

REL --
TO **LO. 10** IN YOUR
OF TAP (SQUEEZE YET)...

WITH HEEL OF LEFT HAND
DIAL THE **EMBOSSING WHEEL**
UNTIL THE LETTER YOU WISH TO
EMBOSS SHOWS IN THE
CIRCLE WINDOW.

NOW! SQUEEZE* THE HANDLE
SHARPLY TO EMBOSS LETTER.
AND **DIAL** AND **SQUEEZE***
DIAL AND **SQUEEZE*** FOR
EACH LETTER OF THE WORD.

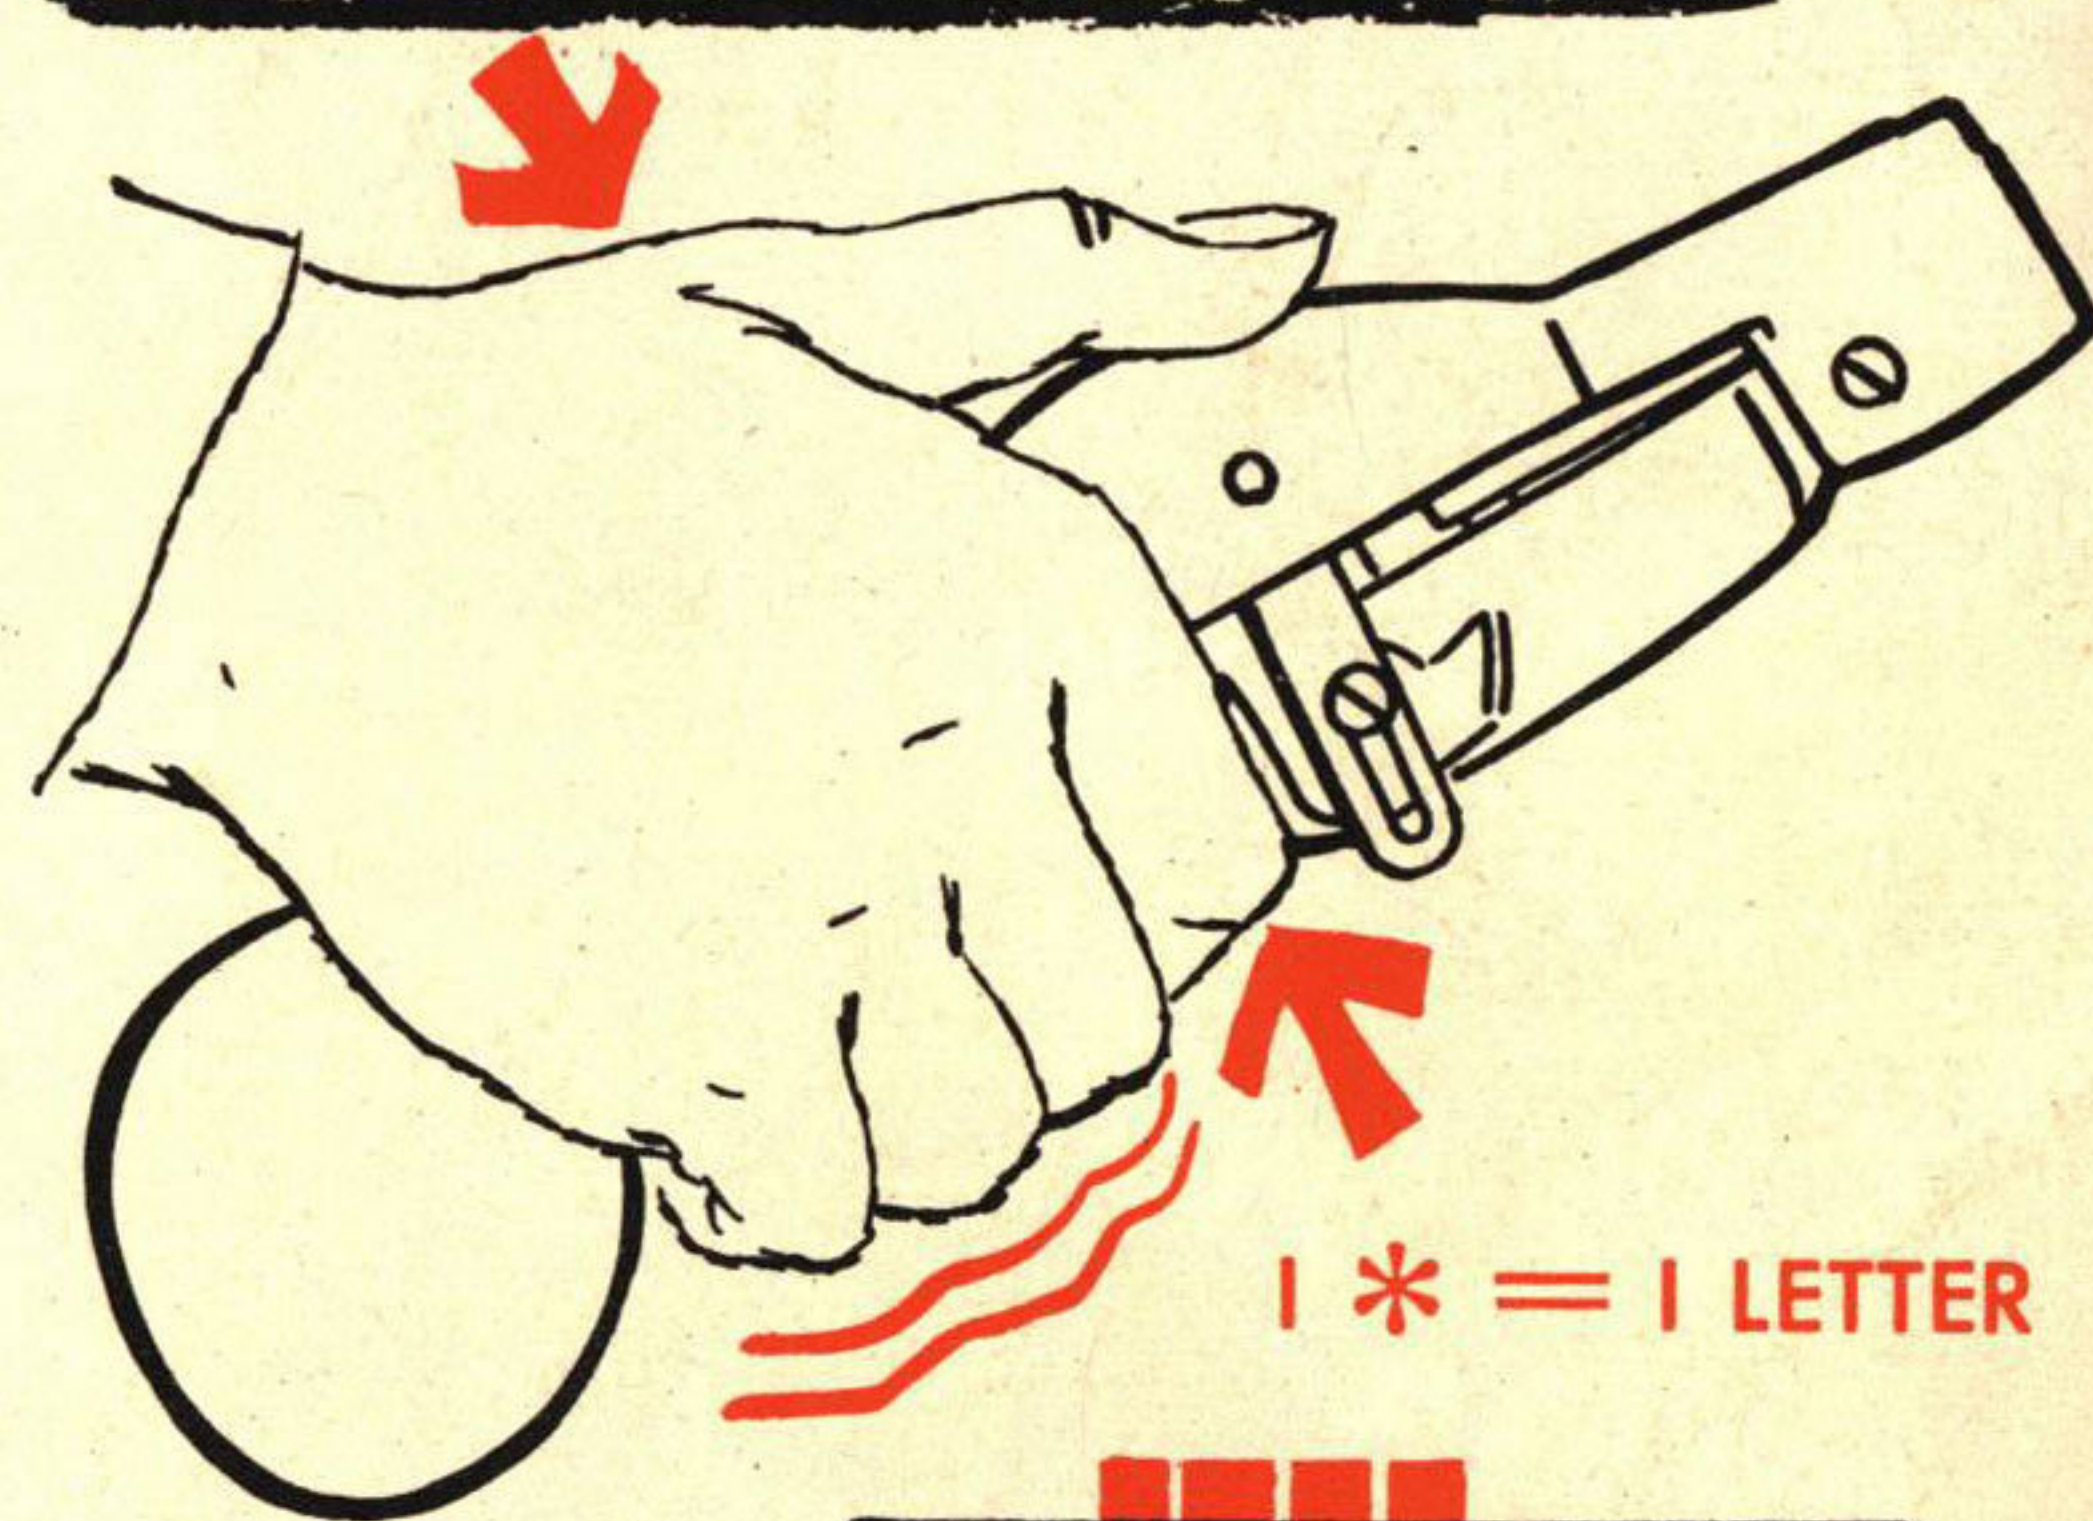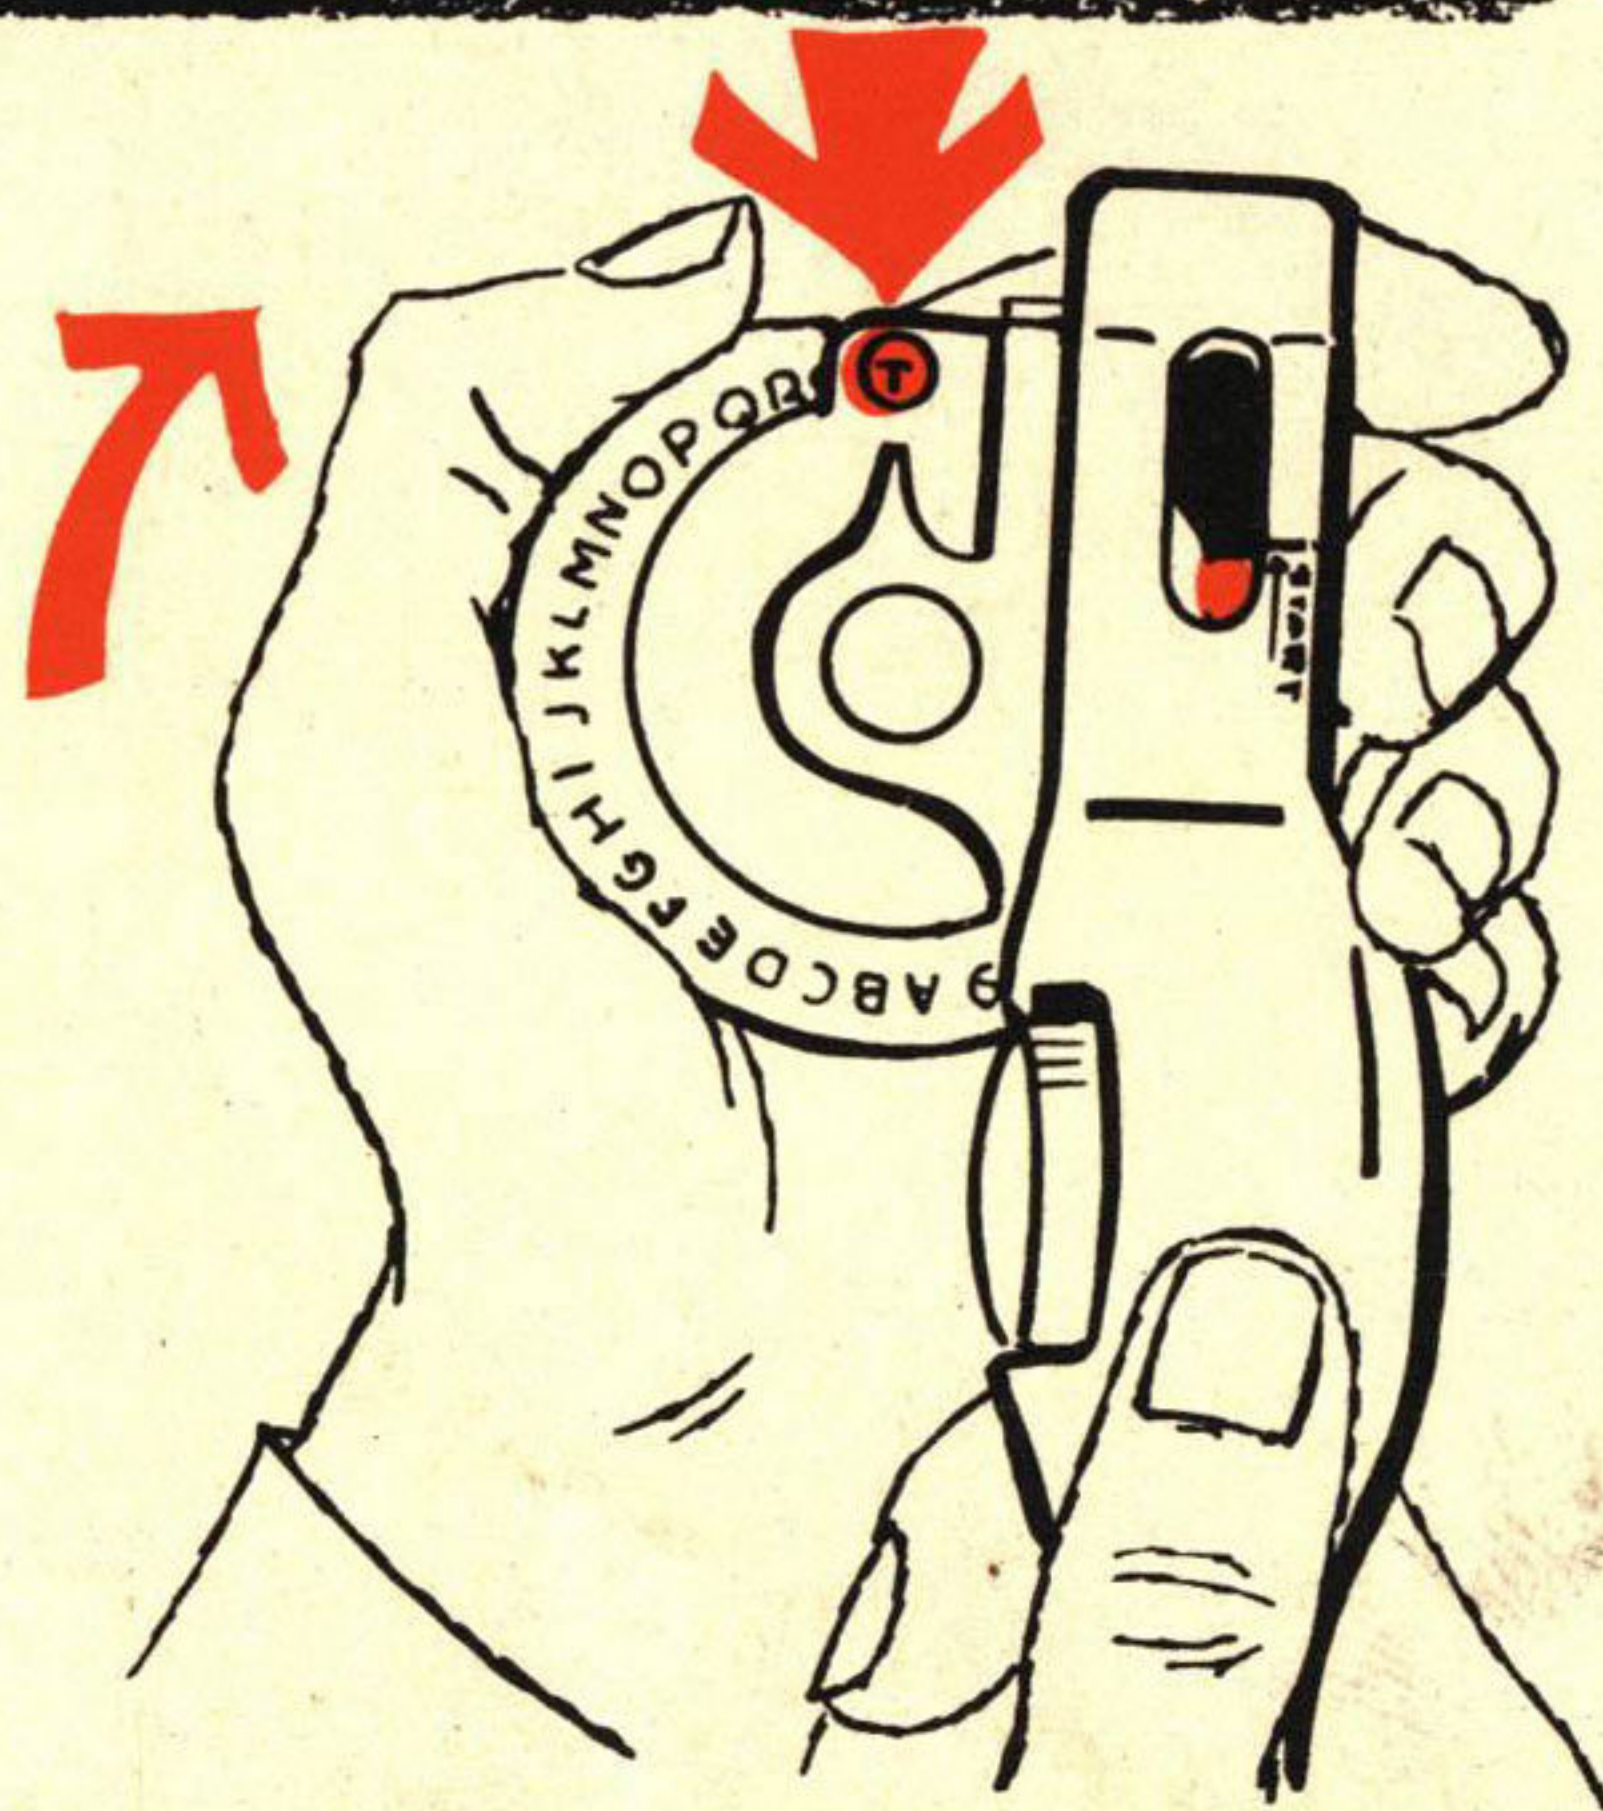



| * = | LETTER

ABCD


THEN... TO MAKE A SPACE
BEFORE THE NEXT WORD....
GENTLY SQUEEZE THE HANDLE
UNTIL YOU HEAR A "**CLICK**" *--
NO FURTHER.




YOU HAVE MADE A SPACE WHEN
YOU HEAR THE **CLICK** *--
CAREFUL, DON'T EMBOSS BY
SQUEEZING TOO FIRMLY....

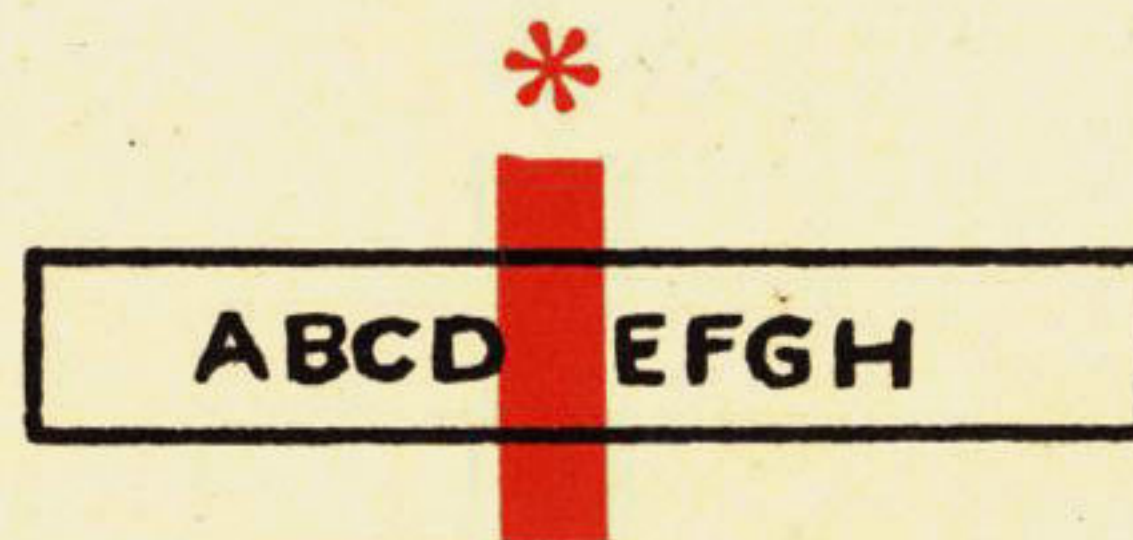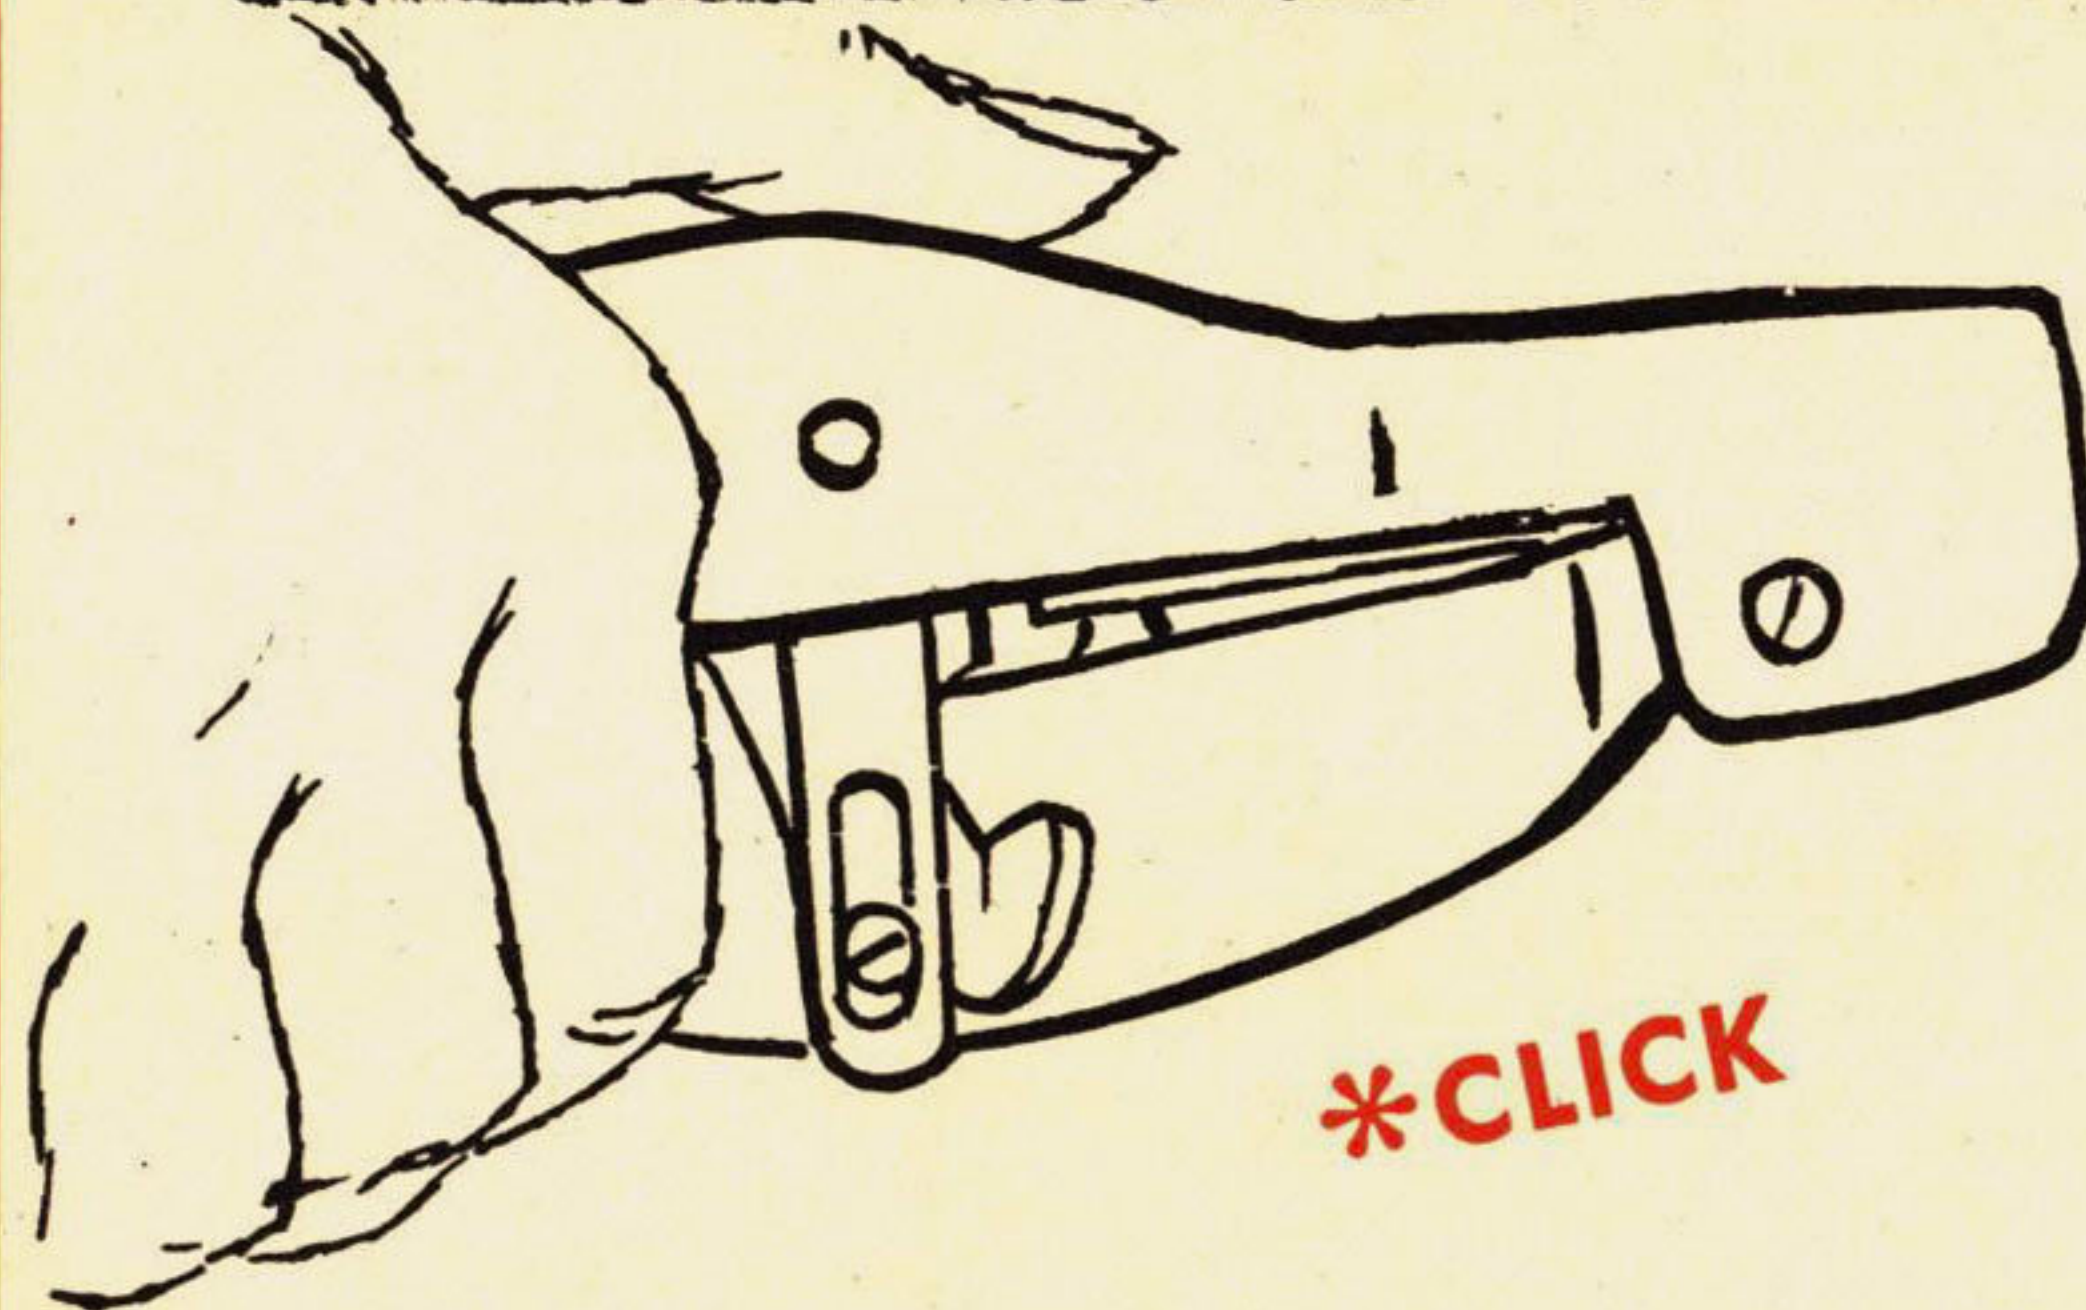

TO CENTER CROSS
ON THE ~~RECORD~~ ~~RECORD~~ ~~RECORD~~
ADVANCE TAPE TO ALLOW
VISIBLE MARGIN.

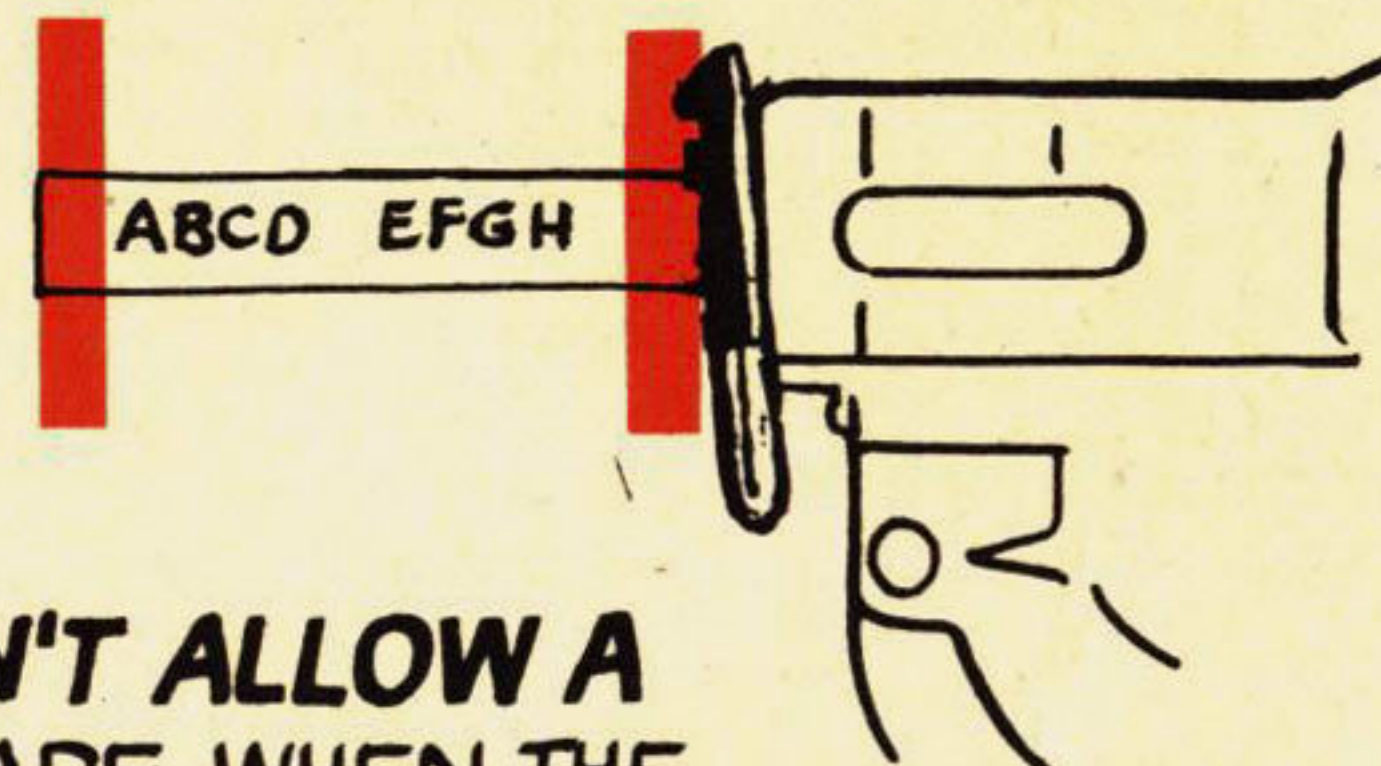

ON THE M-33-- **DON'T ALLOW A
MARGIN**-- STOP TAPE WHEN THE
LAST LETTER APPEARS PAST
END OF MACHINE.

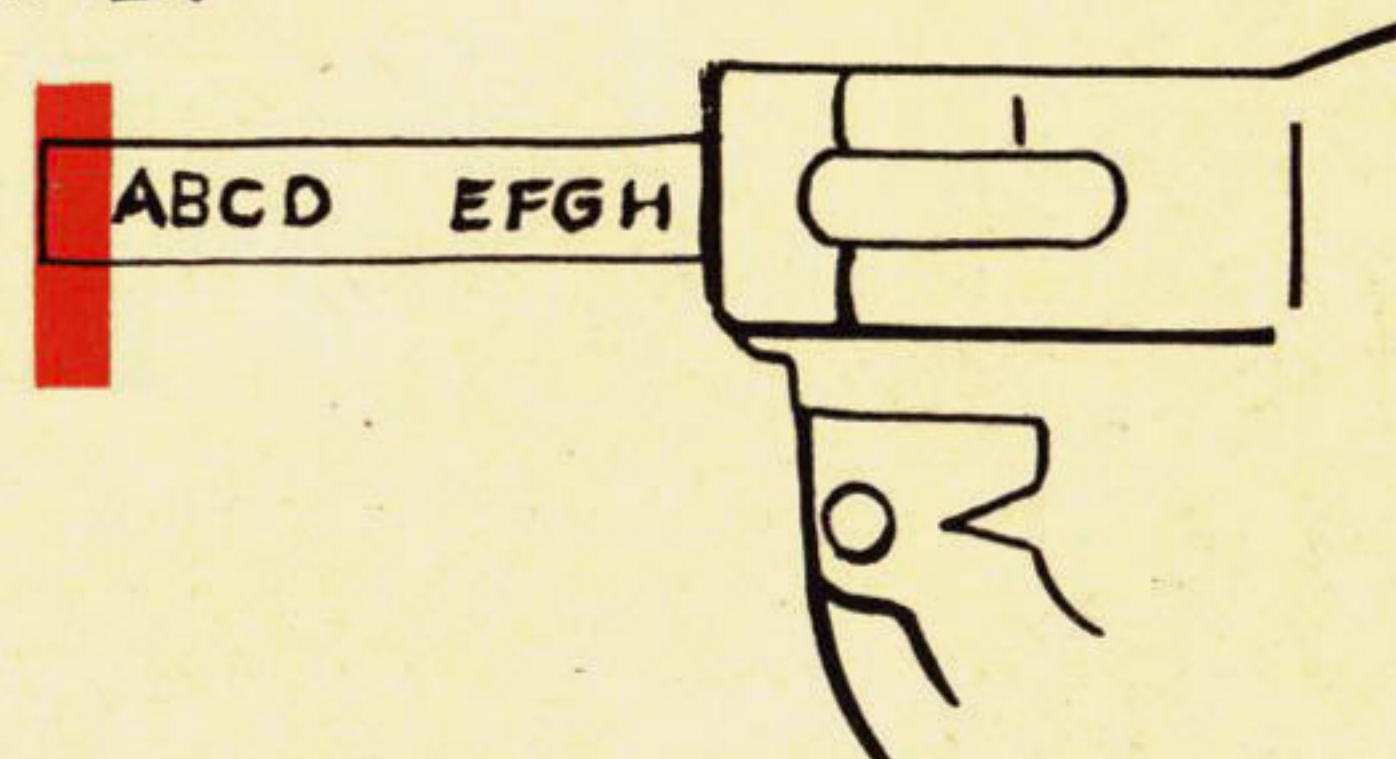


TO **LO. 10**
OF 147

ABEL

-33....

**PUSH THE
CUT-OFF ACTUATING BUTTON
(BENEATH THE EMBOSSING WHEEL)
CONVERTING HANDLE TO
CUT-OFF MECHANISM
AND **SQUEEZE HANDLE FIRMLY.****

**TO CUT OFF YOUR LABEL,
ON THE M-11... **PRESS UPWARD**
ON **BLADE CUT-OFF HANDLE--**
(ON THIS MODEL BUTTON
ACTUATES **HOLE PUNCH**).**

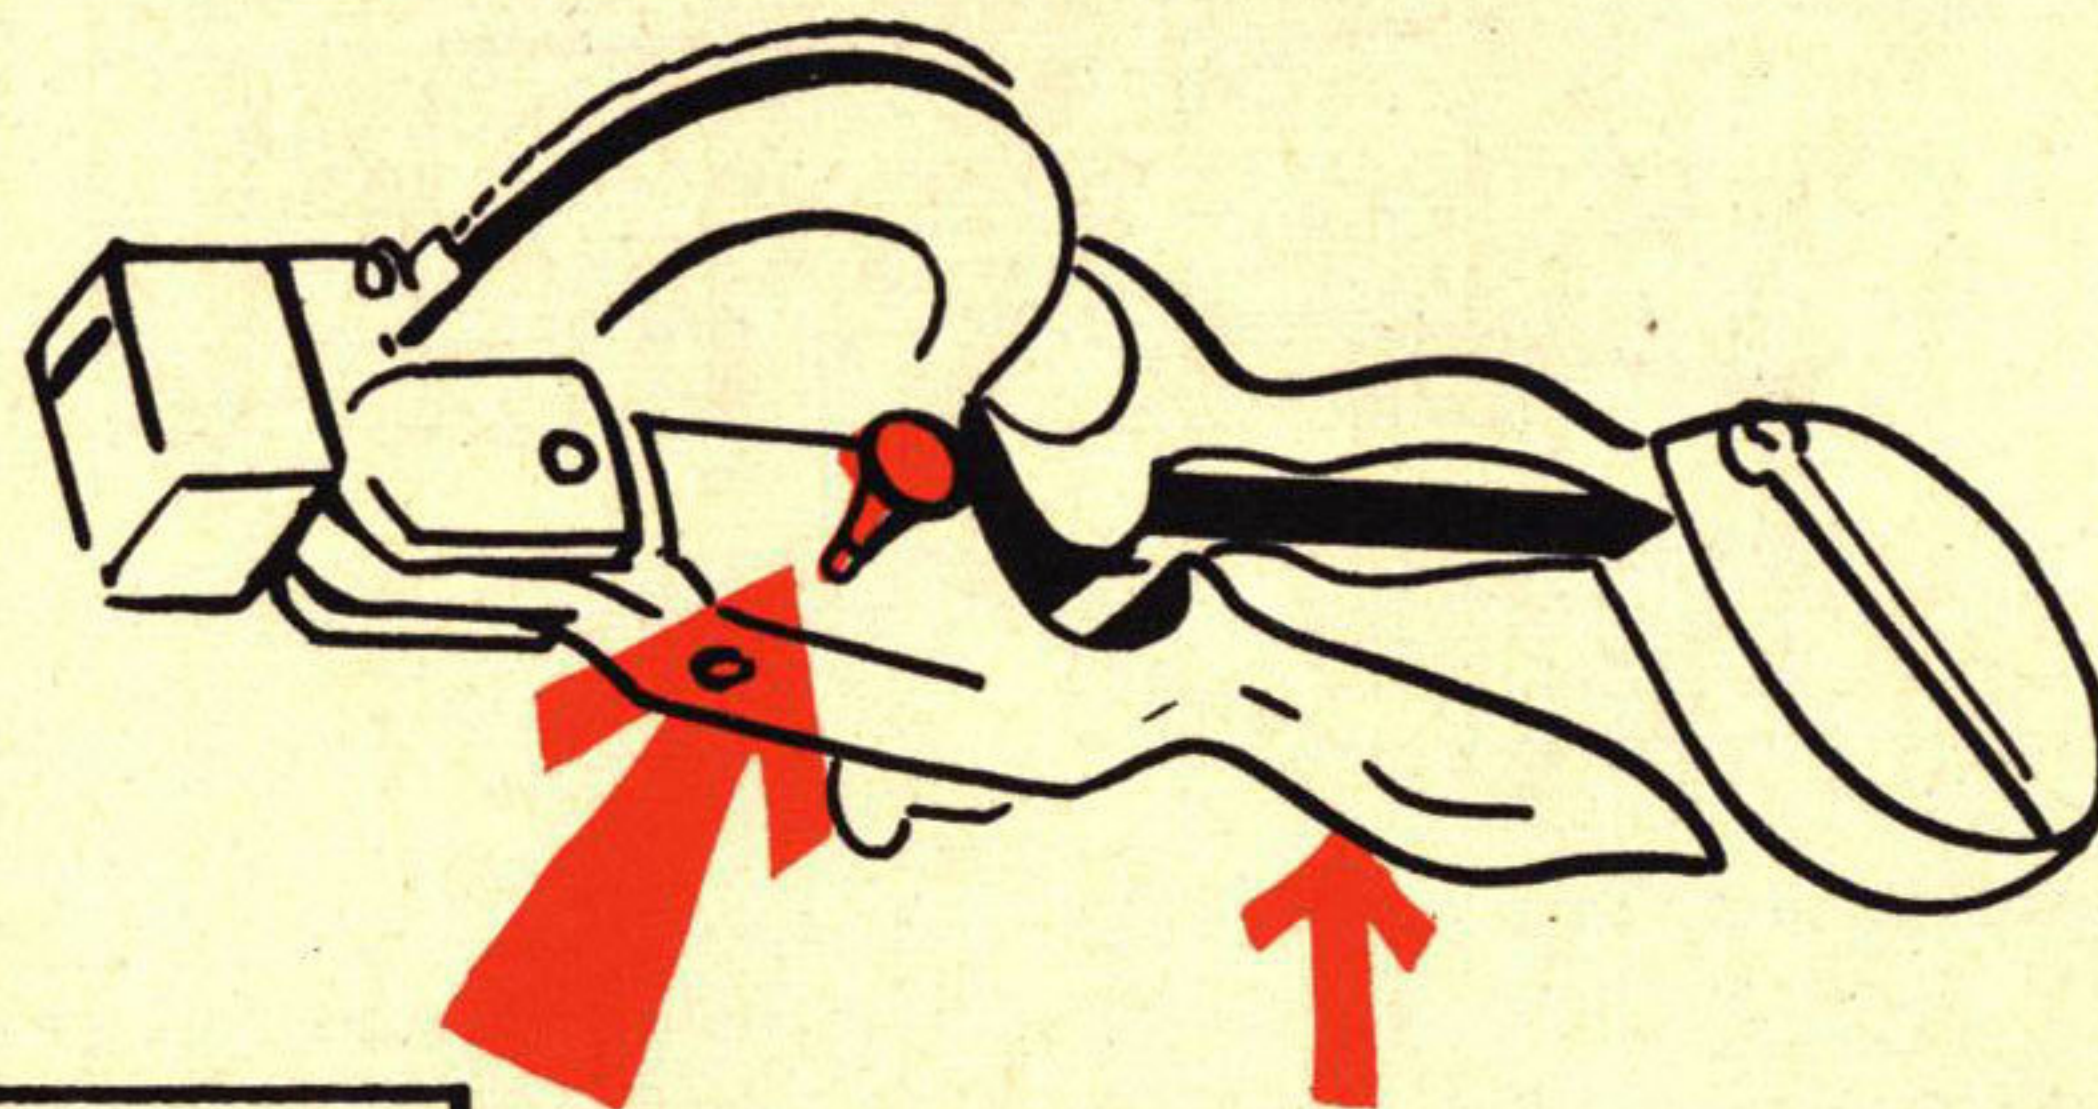


M-22

FEATURES SQUARE CUT-OFF

M-33

FEATURES ROUNDED CUT-OFF

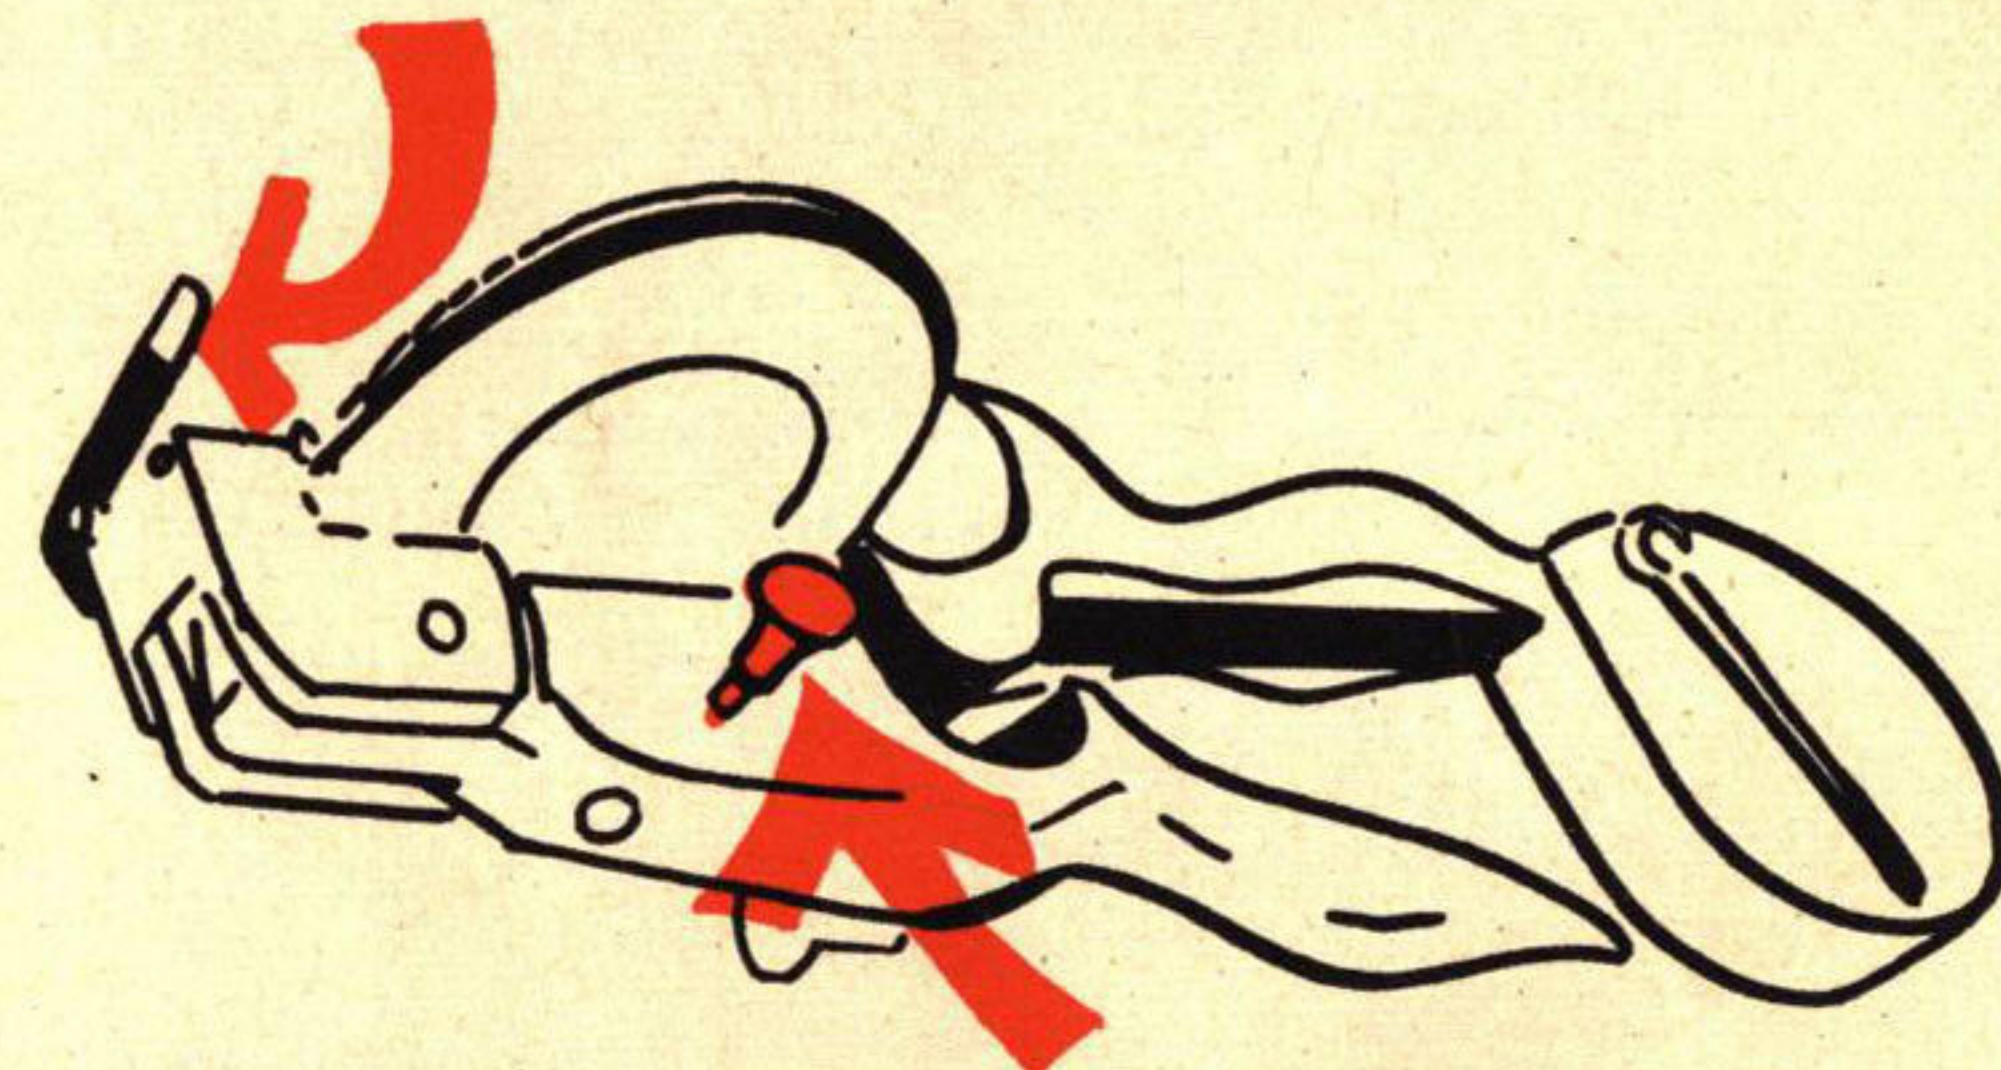

HOLE PUNCH —


M-11 ○

**IF HOLE IS DESIRED—PUSH
BUTTON AND SQUEEZE
HANDLE BEFORE YOU CUT
OFF LABEL**

TO **APPLY** YOUR LABEL --
REMOVE THE PLASTIC LINER THAT
PROTECTS **DYMO** TAPE'S ADHESIVE.




AGAINST A FLAT SURFACE --
SCRATCH BACK A **CORNER**
WITH YOUR FINGERNAIL AND
PEEL IT OFF... DON'T TOUCH
THE ADHESIVE.

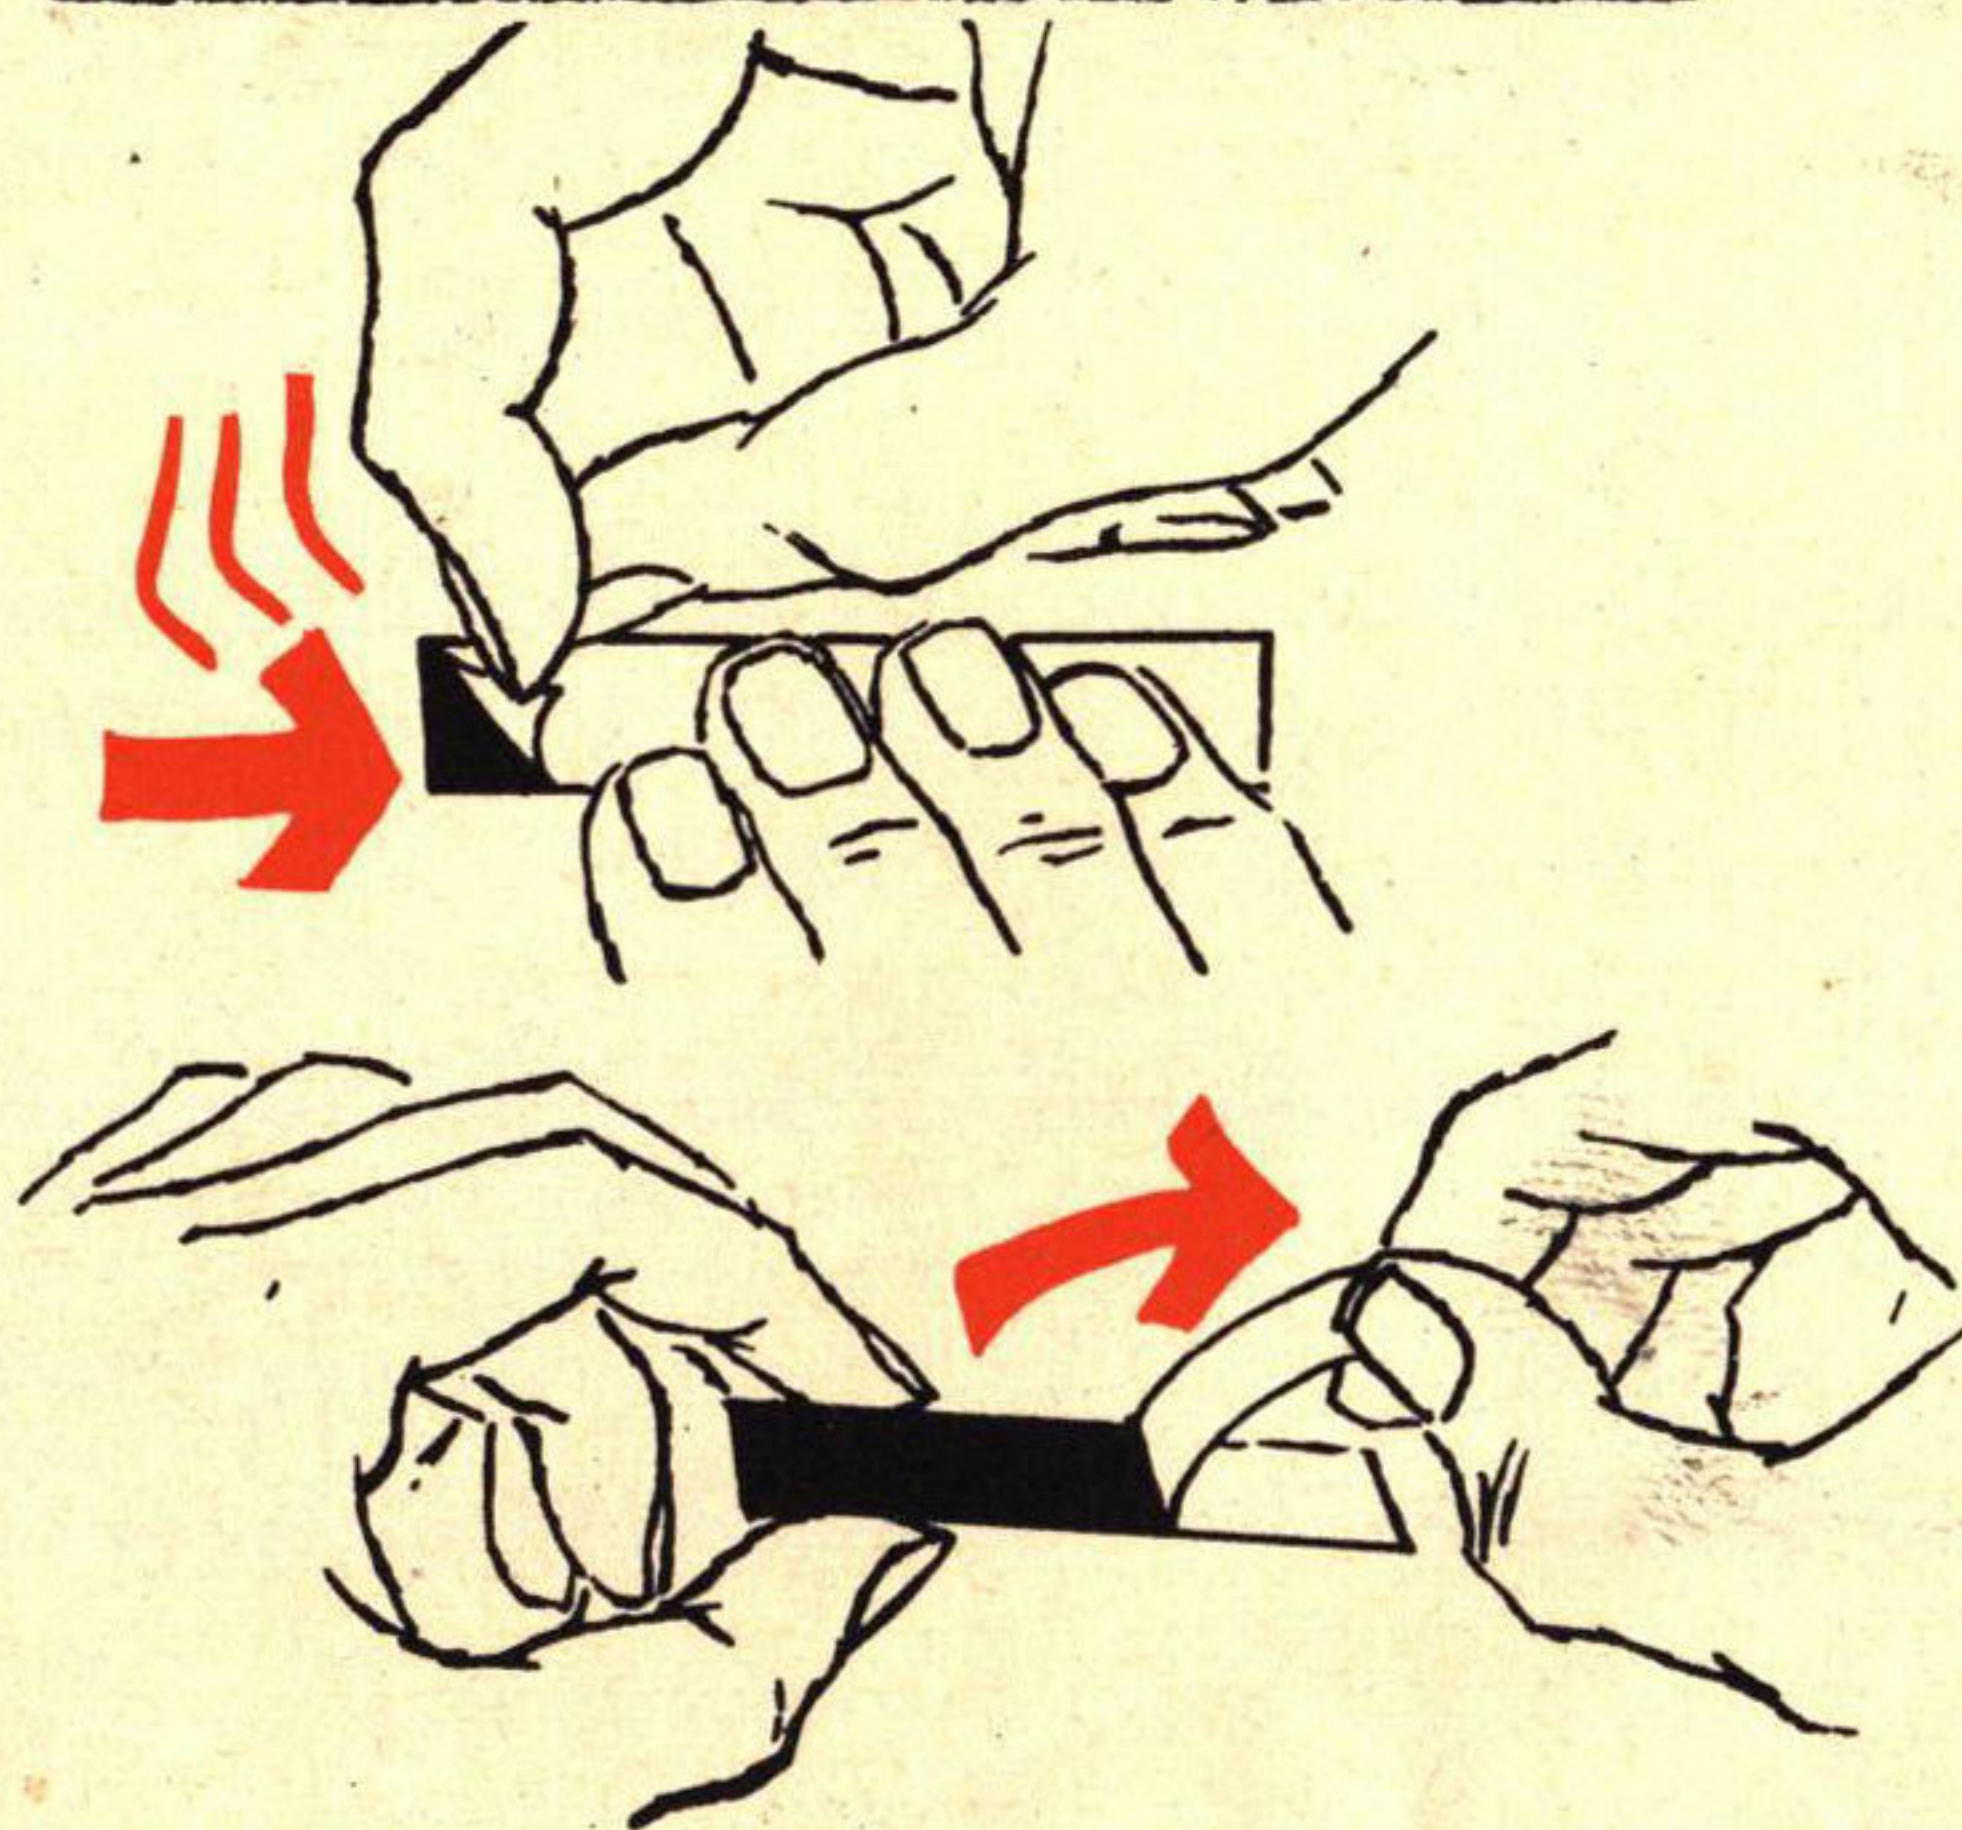


CLEAN SURFACE
LABEL **FIRMLY** **CROSS**
ELIMINATE AIR POCKETS -- RUB
ALL EDGES AND BETWEEN
WORDS VIGOROUSLY.*

*REMEMBER

... BEFORE starting
NEXT label, bring
tape **BACK** again to
START ARROW.

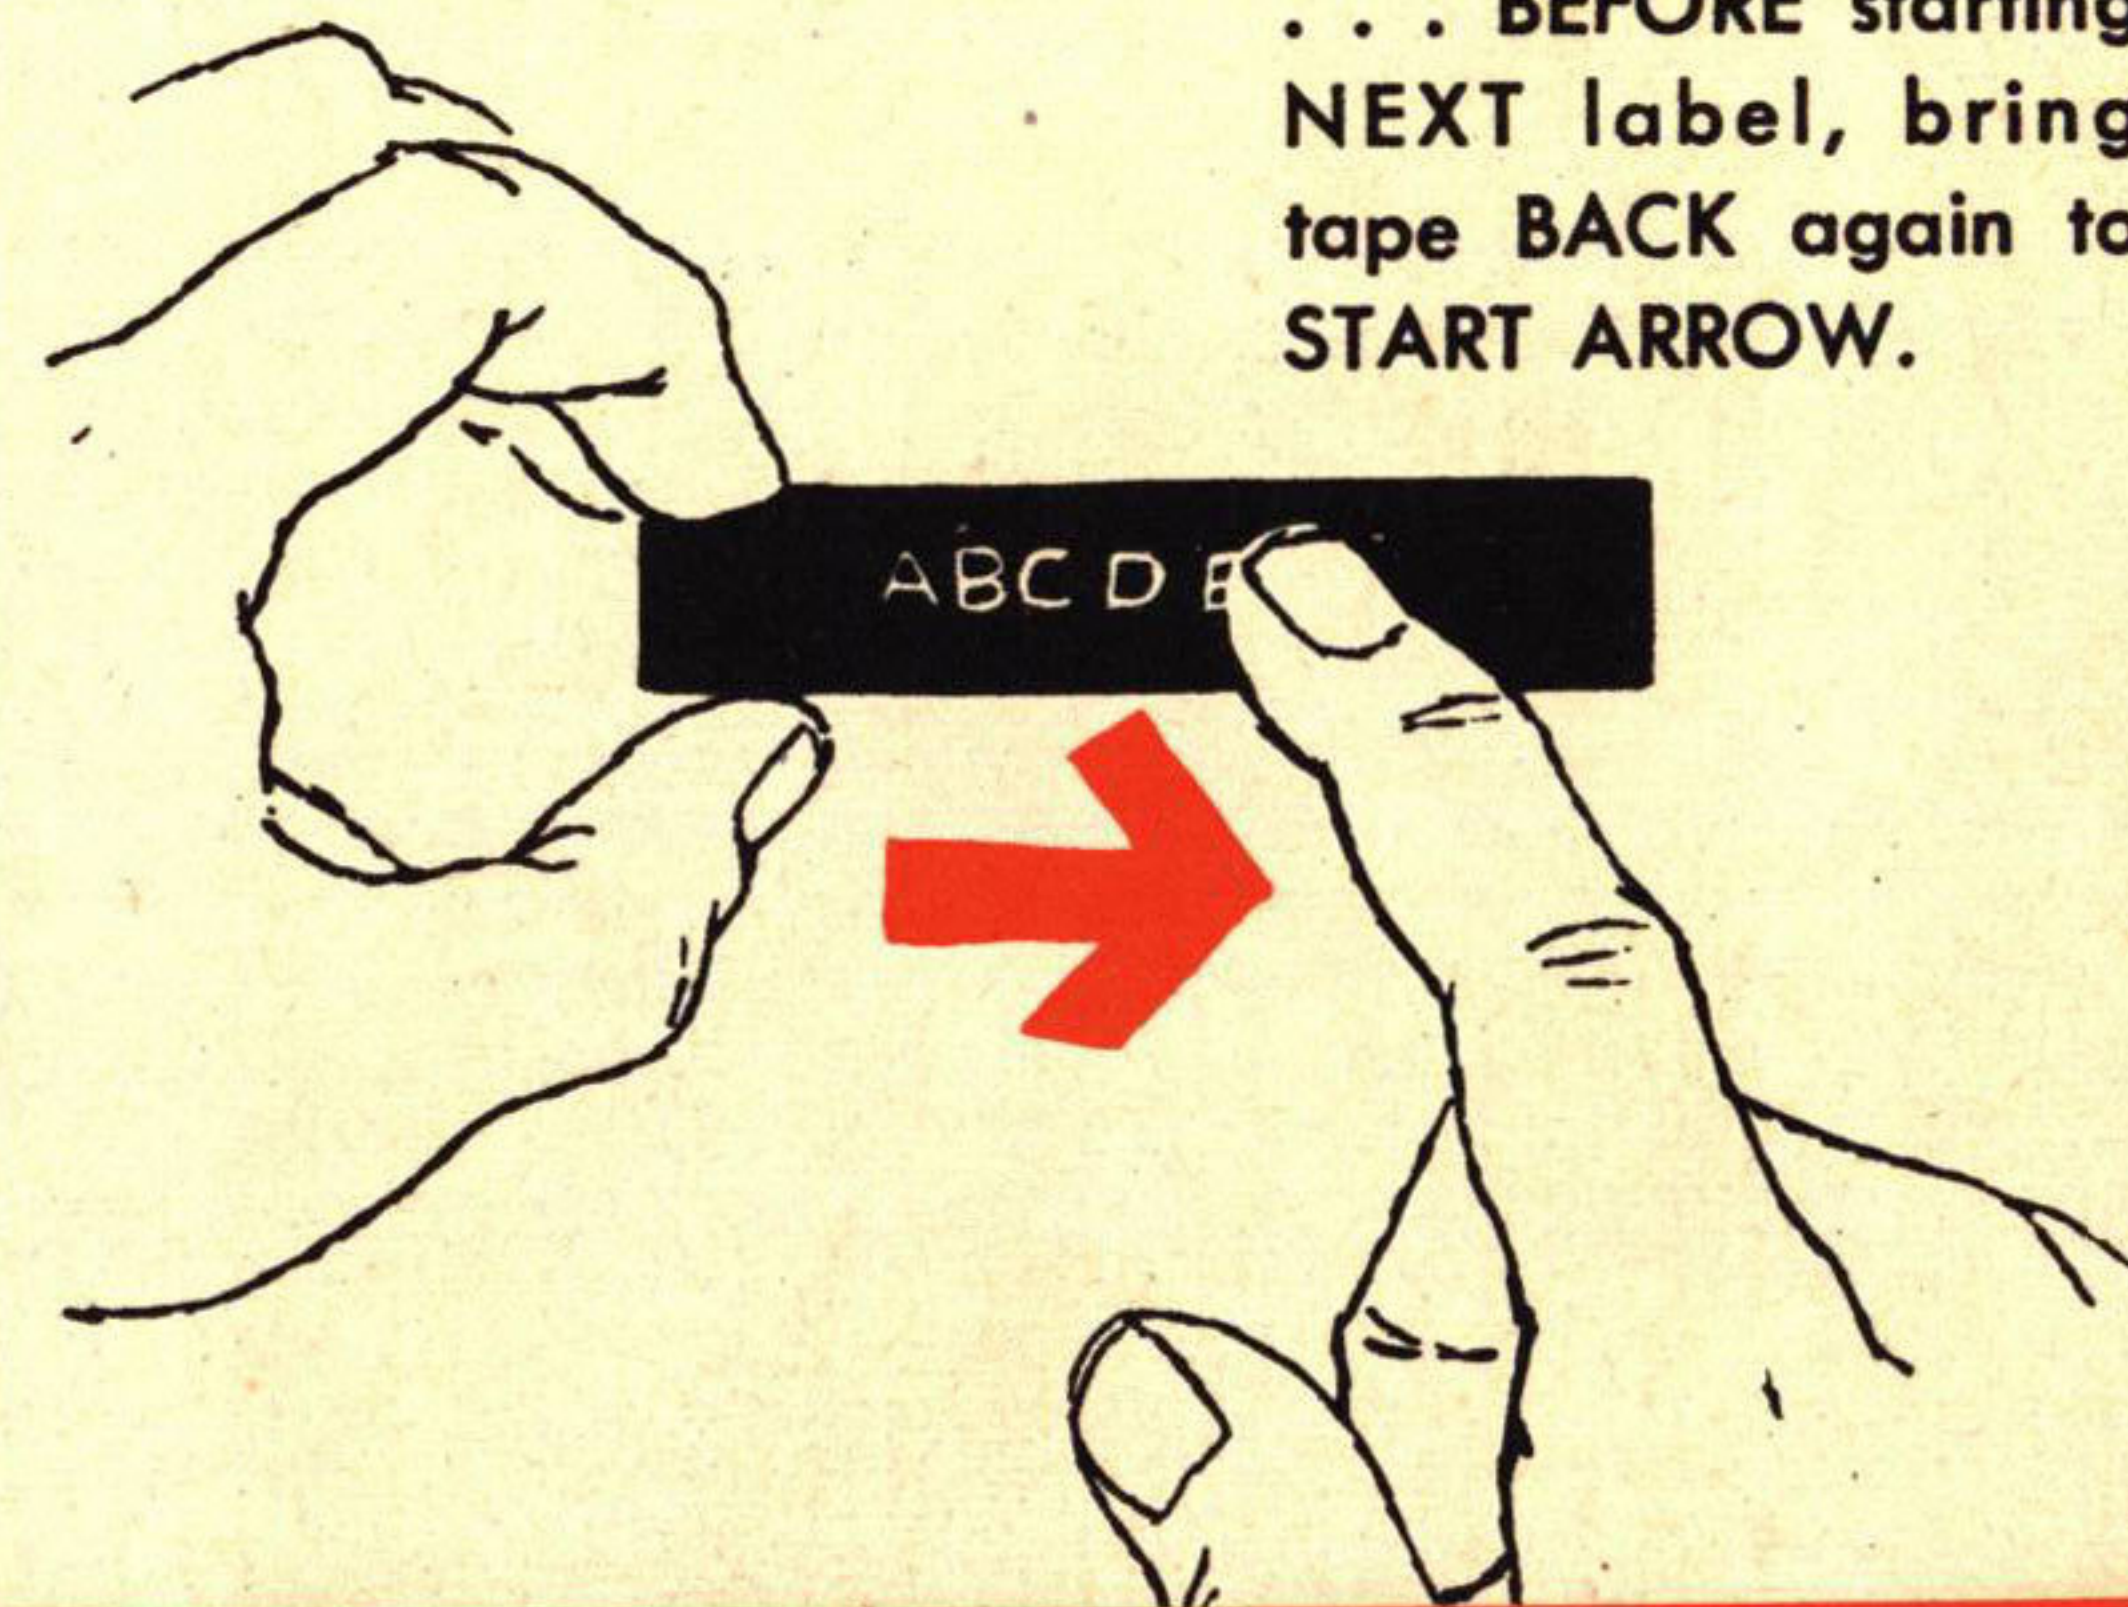

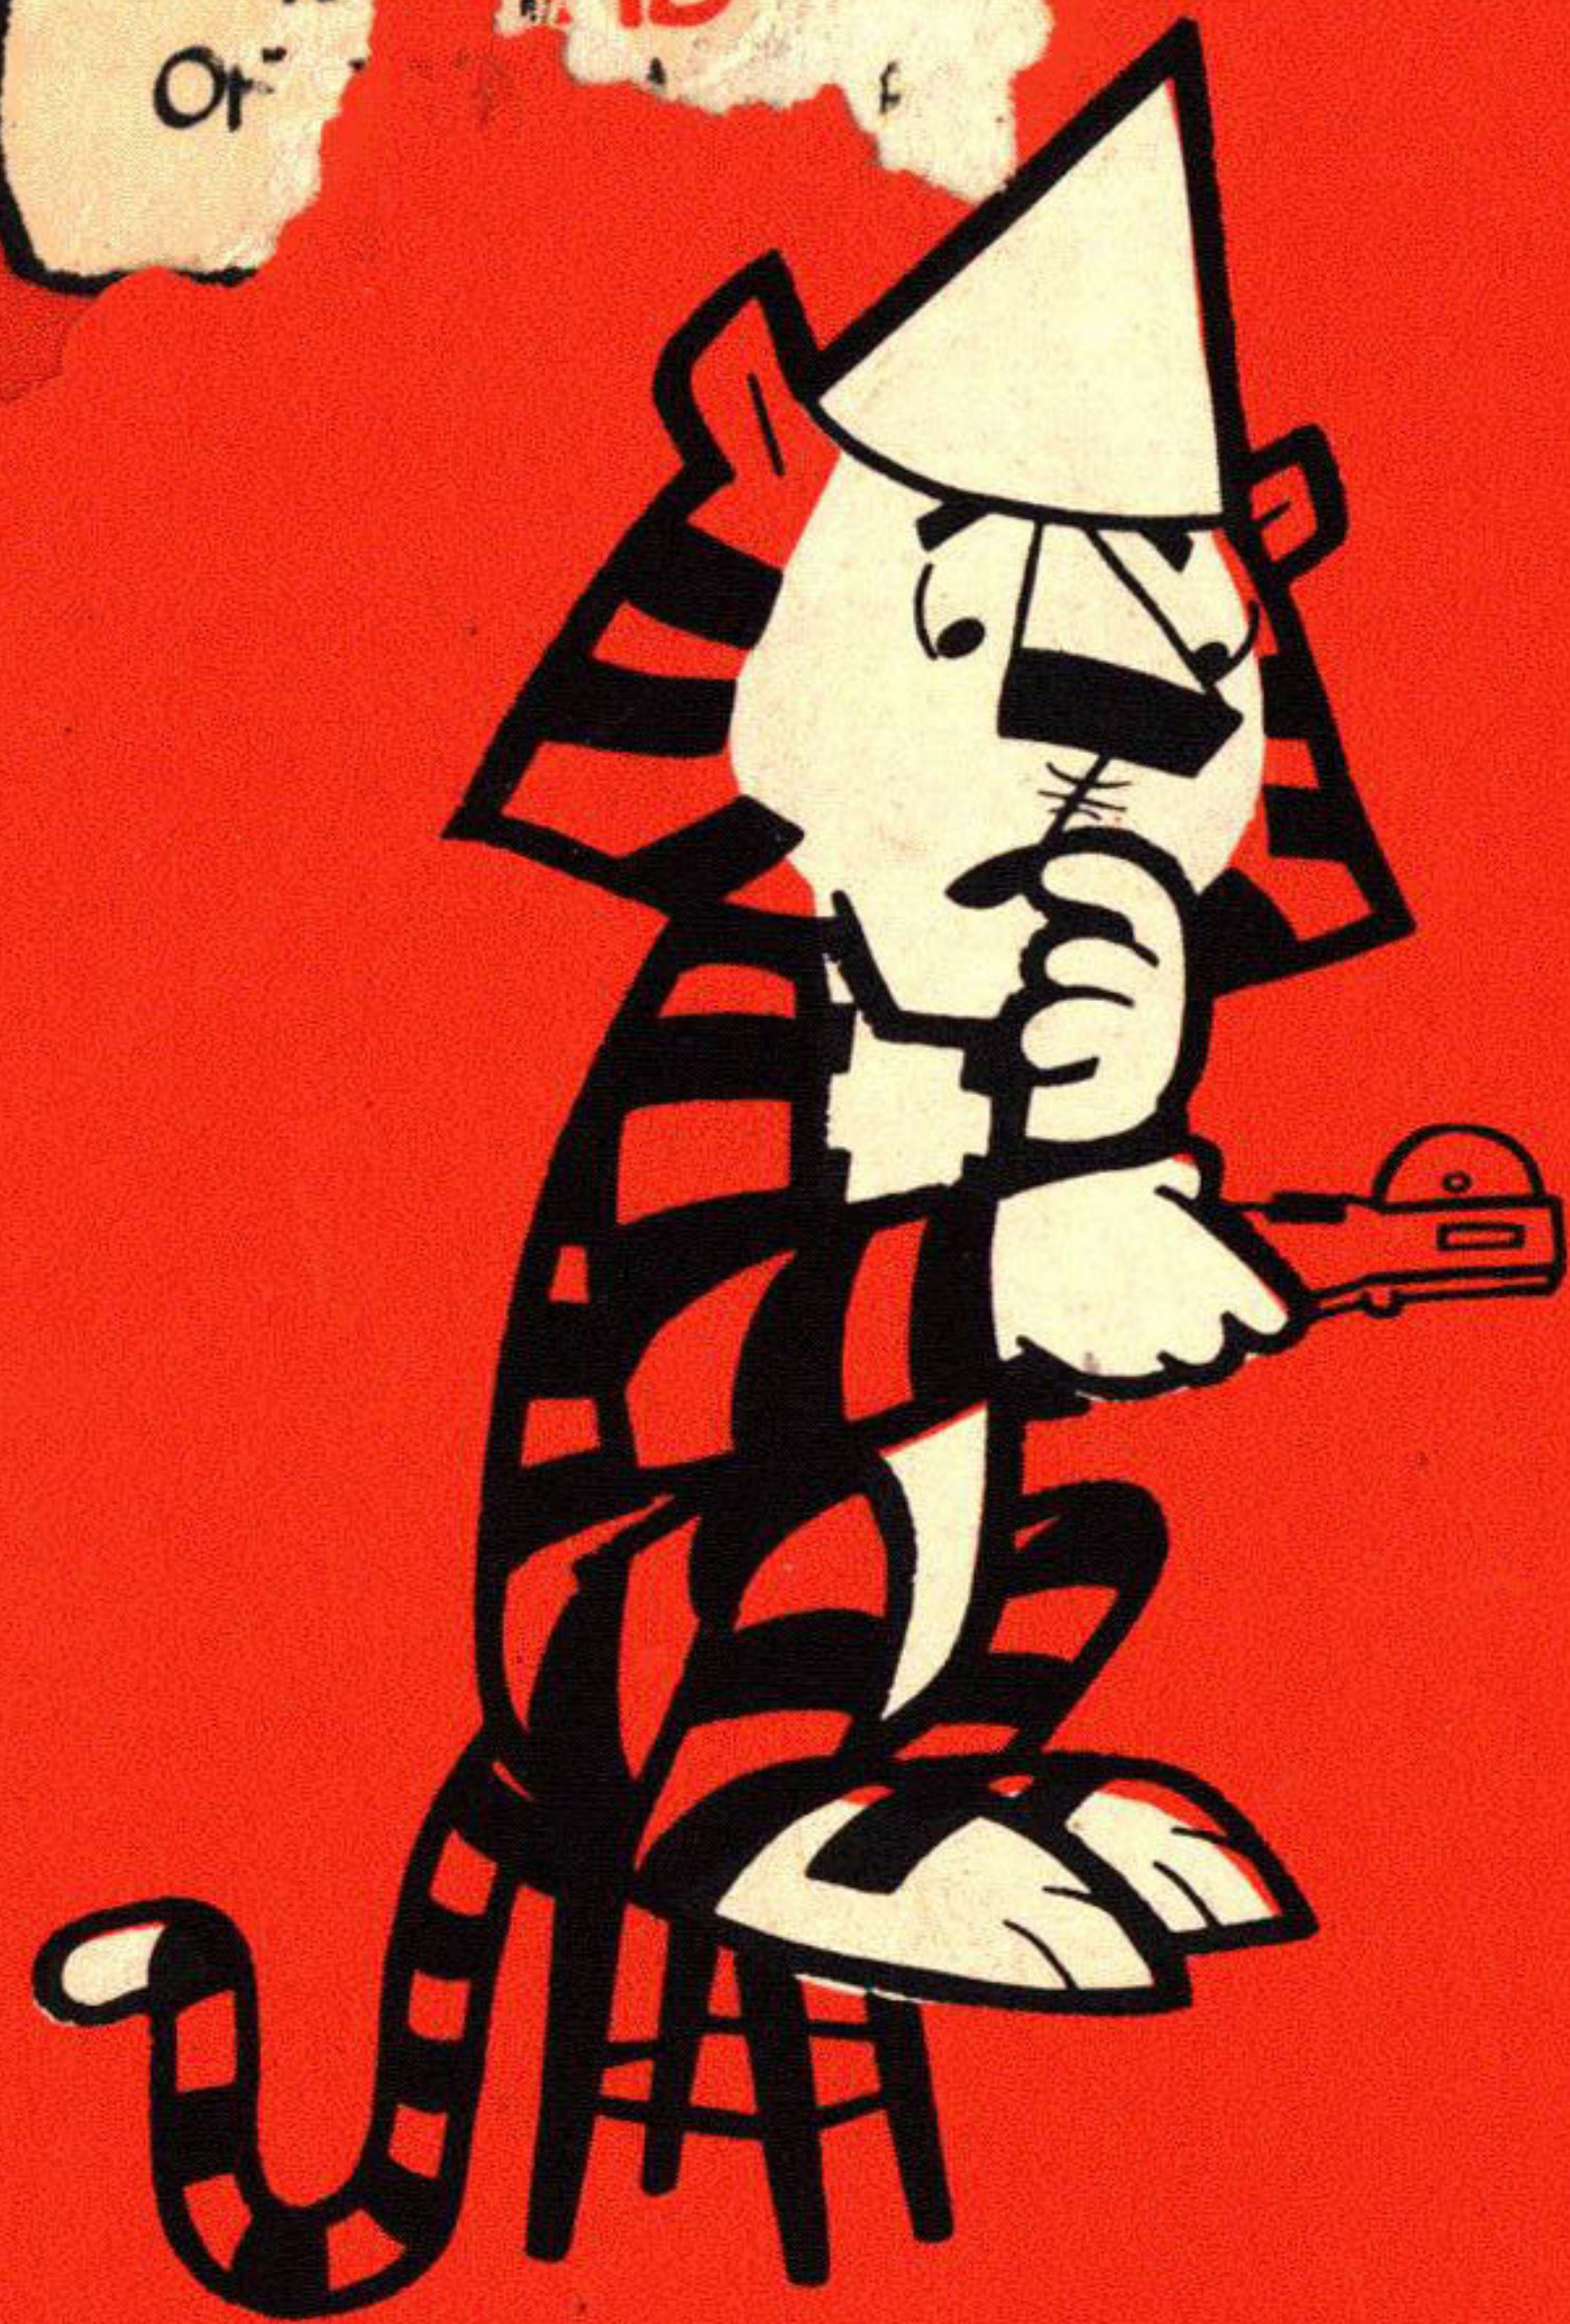

OOOPS...MAKE A MISTAKE????

- TOO MUCH BLANK SPACE at the *start* (or not enough)? Means end of tape was not opposite the START ARROW.
- LETTERS INSTEAD OF BLANK SPACES between words? You are squeezing HANDLE too hard — machine is embossing.
- LETTERS OVERLAPPING? Tape is slipping because of dirty or oily FEED ROLLER — Clean roller with non-residual solvent.
- LOSE YOUR PLACE WHILE EMBOSSING A WORD? Bring last letter to START ARROW, BACK SPACE for 3 CLICKS and resume embossing the remainder of your label.




HELPFUL HINTS IN APPLYING DYMO PRESSURE-SENSITIVE TAPE




TYPES OF SURFACES

- DYMO PERMASTICK liquid adhesive (Cat. No. 7123) may be used for ROUGH or POROUS areas such as wood, plaster or concrete. Apply DYMO PERMASTICK to the porous surface, LET DRY until sticky to the touch, and PRESS label down firmly.

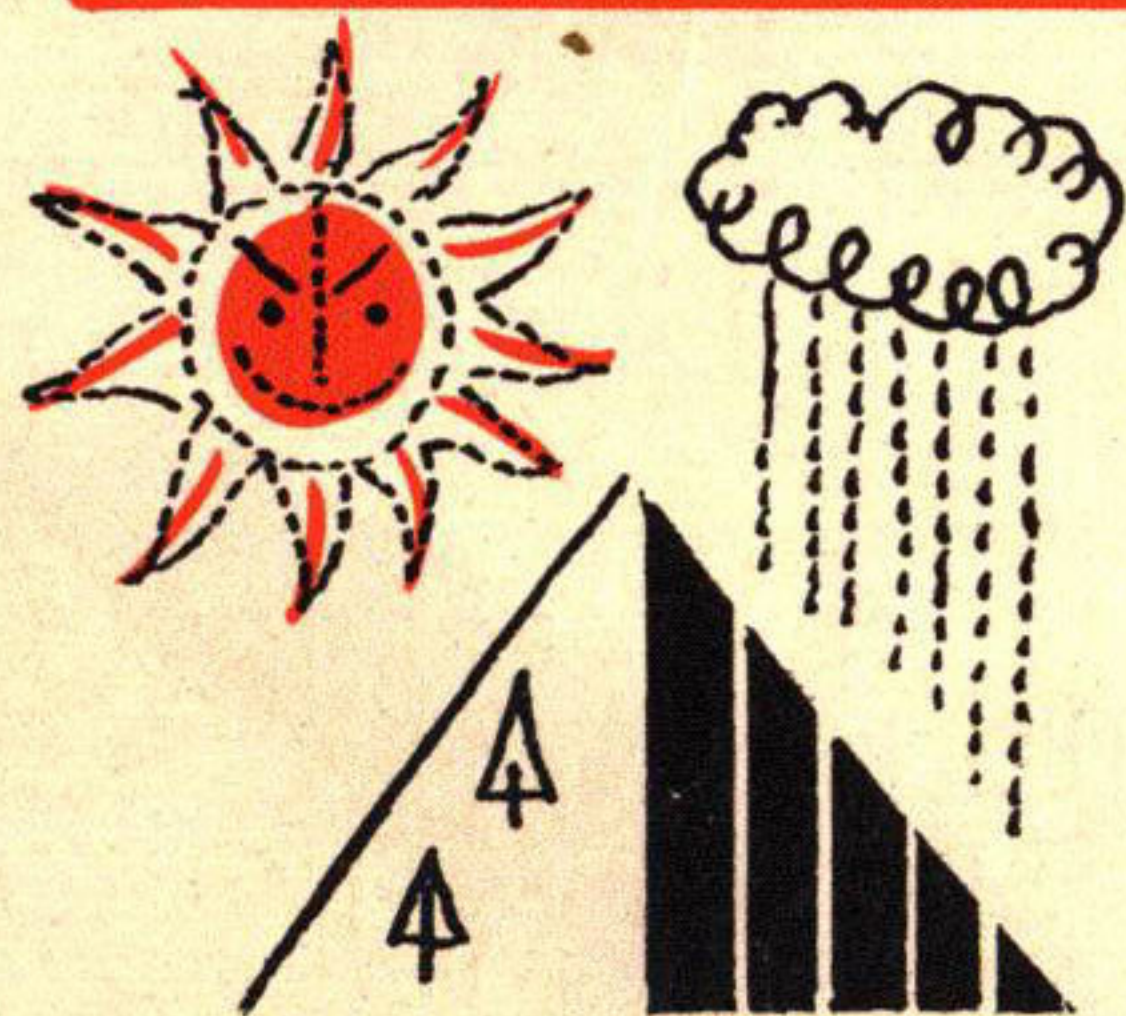

TEMPERATURE AND WEATHER

- Both DYMO vinyl and metal tapes may be used in temperatures to 140° — for *higher* temperatures, use only DYMO *metal* tapes.
- DYMO vinyl and metal tapes are used extensively OUT-OF-DOORS and hold up well.
- If surface is WET or MOIST, before label is applied DRY SURFACE WELL. Once stuck, dampness or water will not affect label.
- If surface is cold, warm first by rubbing briskly with a clean cloth.

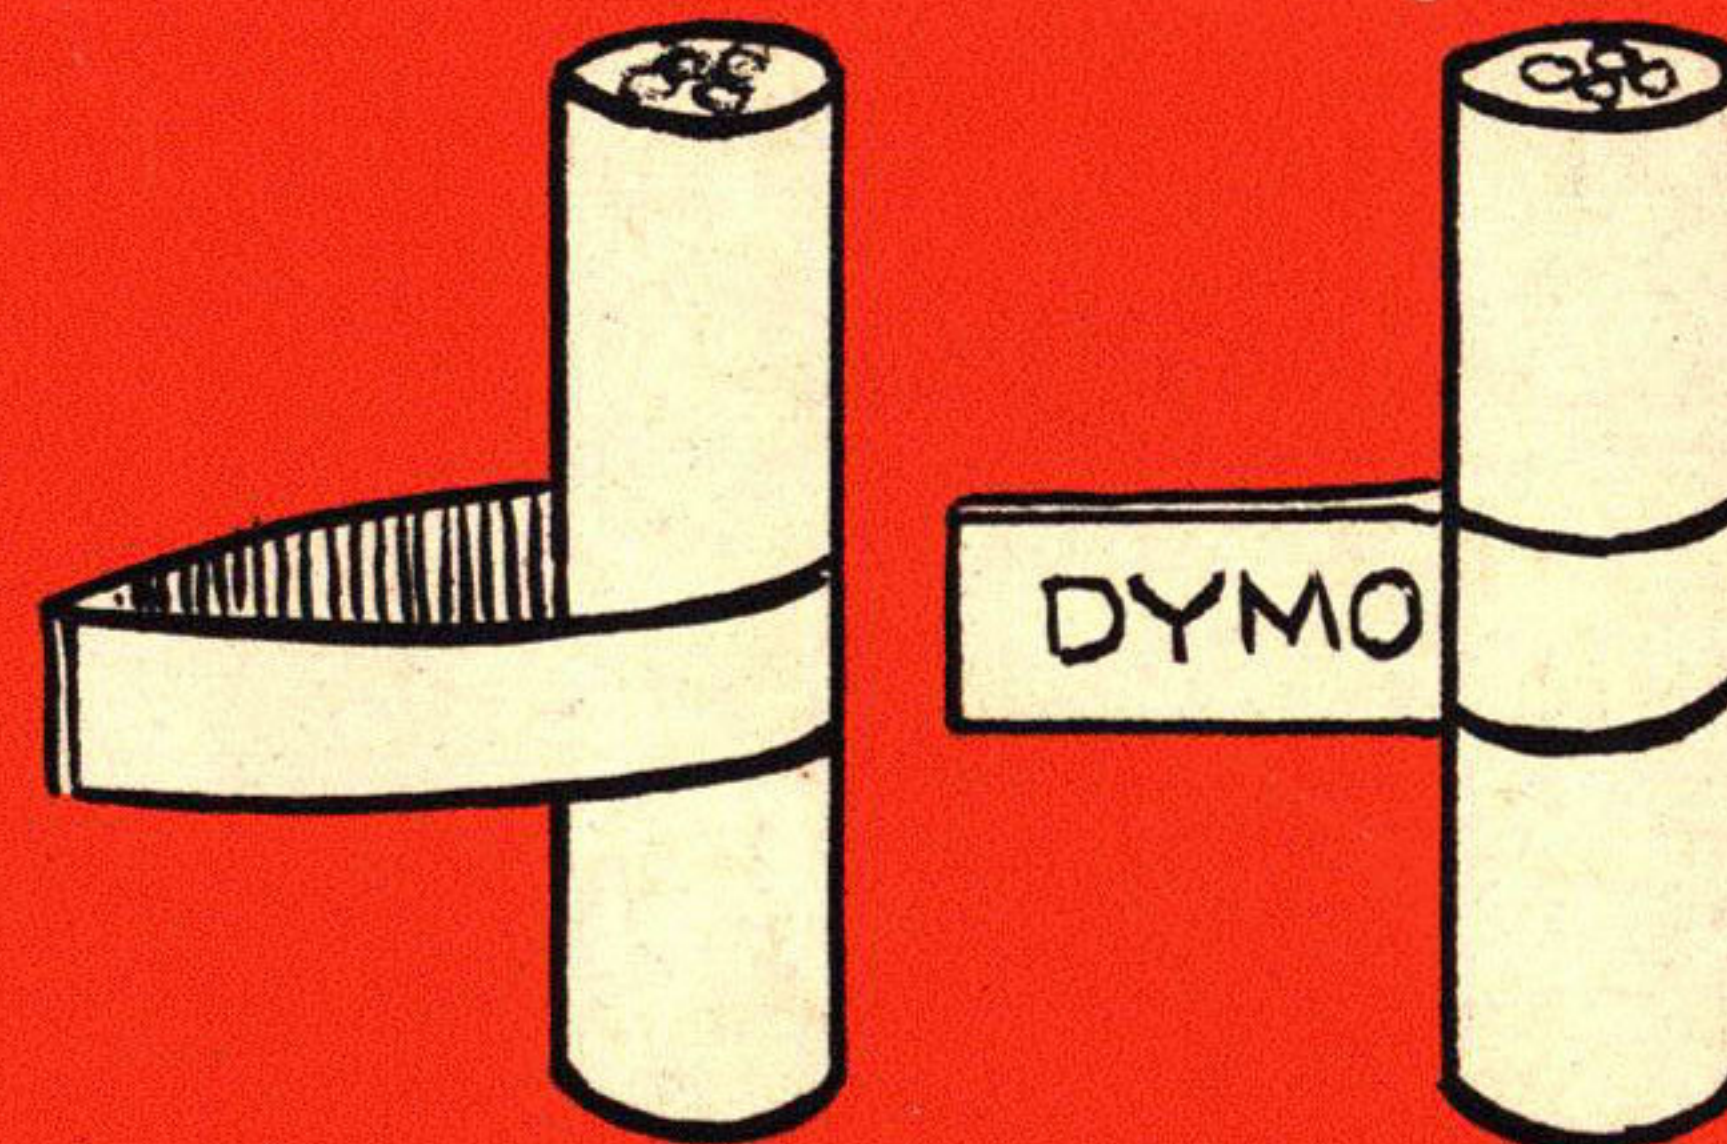

FLAG LABELS

Wrap around or flag labels are useful when labeling pipes, tubes, cables or conduits. Allow enough BLANK tape to wrap around object and adhere to back of label. Press adhesive surfaces together firmly — Crease flag at object to prevent air pocket.



SOME DO'S AND DON'TS ABOUT YOUR TAPEWRITER


- **DO NOT OIL**—THIS MACHINE NEVER requires lubrication—it will make the tape slip.
- **DON'T FORCE THE ACTION** — It should always work easily, never jam or stick. If something seems wrong, don't force it. If you can't locate the trouble, return the machine to your distributor for service.
- **DO BE CAREFUL NOT TO DROP** — the machine is strong and sturdy, but since it is a precision-engineered tool, it can be thrown out of alignment by rough treatment.
- **DO CHECK** the wide choice of colorful DYMO tapes available at your distributor's. 10 colors, plus stripe combinations give added Color Coding applications.
- **DO CLEAN** your machine from time to time. A small brush will quickly remove dust or fuzz from the mechanism. Rubbing alcohol will clean the roller — make the TAPE FEED BETTER. Wipe the chrome finish occasionally to remove any dirt or film.

A MESSAGE FROM THE MAKERS

Welcome to the rapidly growing list of DYMO Users throughout the world.

Your TAPEWRITER represents the finest engineered machine of its kind, and introduces you to a new realm of identification system efficiency.

We hope you will fill out and send us the attached Warranty Card so that your purchase will be registered. We are always interested in our customers and the uses and applications that are being made of our equipment.

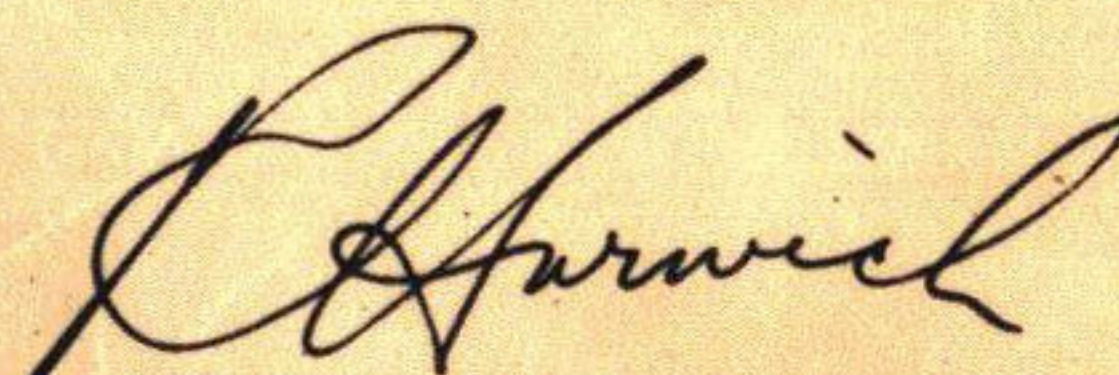

R. Hurwich,
President

Certificate of Warranty

DYMO TAPEWRITERS are unconditionally warranted to be free from defects in workmanship and materials. DYMO INDUSTRIES, INC. will replace or repair defective parts, without charge and will provide complete repair service at fair rates and furnish replacement parts at reasonable prices throughout the normal life of the unit. Final decision as to defects rests solely with DYMO INDUSTRIES, INC., and said warranty will not apply to any unit which has been repaired or altered outside the factory in any way as to affect its stability or reliability, or in which other than genuine factory parts have been installed, or WHICH HAS BEEN SUBJECT TO MISUSE OR NEGLIGENCE. For repair service, carefully pack and return your machine postage prepaid to the DYMO office nearest you, with a short note explaining trouble. Your TAPEWRITER will be returned promptly.

DYMO INDUSTRIES, INC.

Berkeley 10, California

Duryea, Pennsylvania

DYMO OF CANADA, Ltd.
Toronto, Canada

DYMO INTERNATIONAL, S. A.
Lausanne, Switzerland

